


HAMBURG 1 (HAB-80001)**Product description**

Ø85 - 312 mm

**Luminaire Structure**

- Extruded aluminium housing
- Adjustable: Tilt 90°, Rotation 355°
- With powder coating
- Integral control gear
- With 3-phase universal adapter

Optic**M****Product colour**


03 - White (RAL 9003) 15 - Black (RAL 9005)

HAMBURG 1 (HAB-80001)


Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Operating temperature	-20 °C to 40 °C
Light source	1 COB	Optic	M	MacAdam Ellipse	3 SDCM
Power	28 W	Optic value	36°	Lifetime L90B10 (hours)	> 90,000
Lumen	1920-2670 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L80B10 (hours)	> 90,000
Efficacy	95 lm/W	Dimming type	Dip switch	Lifetime L80B50 (hours)	> 90,000
Driver option	Integral control gear	Product colours	Black, White		
Driver	Constant current (CC)	Weight	1.2 kg		


HAB-80001

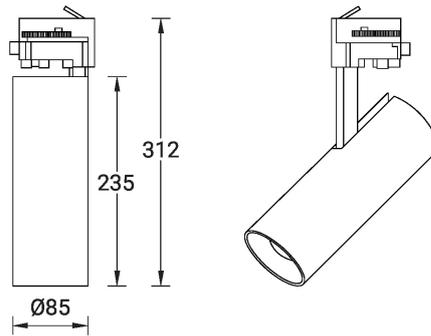


HAMBURG 1 (HAB-80001)**Accessory**



Reflector 15°
A80002



Reflector 24°
A80003



Reflector 60°
A80004
