

LUNAR 5 (LAN-90012)



Product description

Top Ø1000 mm - 1 side




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Optic

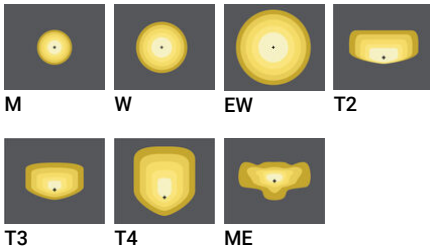

Product colour

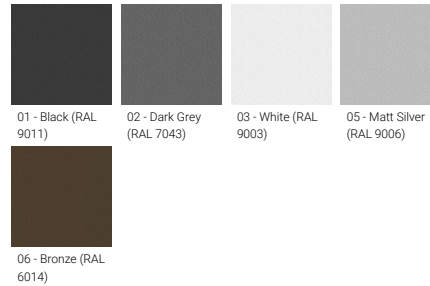

Special finishes upon request

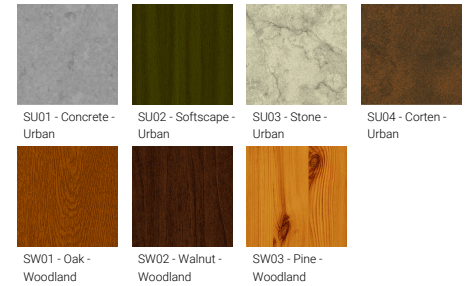

LUNAR 5 (LAN-90012)

Technical information

Material	Aluminium	Optic	M, W, EW, T2, T3, T4, ME	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
Light source	24 LED	Optic value	30°, 57°, 107°x113°, 139°x59°, 130°x91°, 106°x71°, 140°x62°		Weight	25.0 kg
Power	52 W	CCT / CRI	3000K CRI80, 4000K CRI80		Operating temperature	-20 °C to 40 °C
Lumen	6069 - 6954 lm	Bug	B1-U0-G1, B2-U0-G0, B2-U0-G2, B3-U0-G0, B3-U0-G1		Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Efficacy	117 - 134 lm/W	ULR	<1%		MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	ULOR	<1%		Lifetime L90B10 (hours)	> 90,000
Driver	Constant current (CC)	CIE flux code n°3	97, 98, 99		Lifetime L80B10 (hours)	> 90,000
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off		Lifetime L80B50 (hours)	> 90,000

LAN-90012

