

## MUSTANG 39 (MS-91182)




microVos microPrim™


### Luminaire Structure

- Formed sheet aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


### Optic

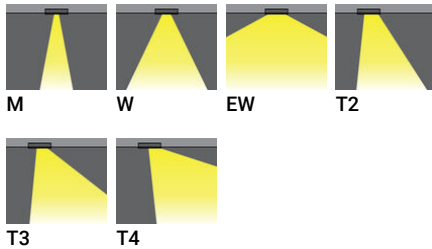

### Product colour

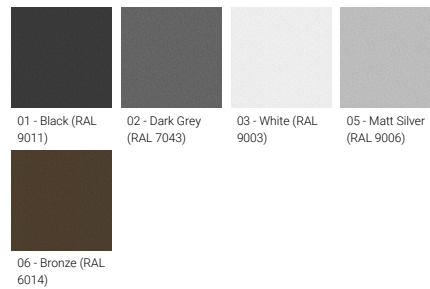

### Special finishes upon request

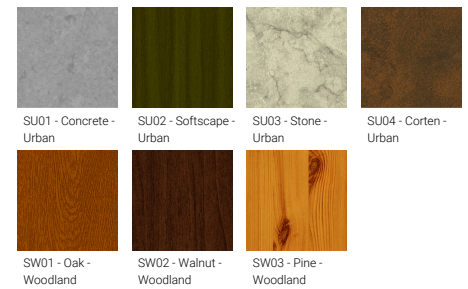


## MUSTANG 39 (MS-91182)

### Technical information

|                      |                       |                          |                                                                                                                                                                      |                                 |                                                                                                                 |
|----------------------|-----------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Material</b>      | Aluminium             | <b>Optic value</b>       | 30°, 52°, 108°, 143°x47°, 140°x71°, 100°x81°                                                                                                                         | <b>Operating temperature</b>    | -20 °C to 40 °C                                                                                                 |
| <b>Light source</b>  | 24 LED                | <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80                                                                                                                                             | <b>Through wiring</b>           | Single cable entry, through wiring upon request                                                                 |
| <b>Power</b>         | 54 W                  | <b>Bug</b>               | B1-U0-G1, B2-U0-G0, B2-U0-G2, B3-U0-G0                                                                                                                               | <b>Lens / Reflector / Optic</b> | Clear toughened glass                                                                                           |
| <b>Lumen</b>         | 5777 - 6666 lm        | <b>ULR</b>               | 0%, <1%                                                                                                                                                              | <b>MacAdam Ellipse</b>          | 3 SDCM                                                                                                          |
| <b>Efficacy</b>      | 107 - 123 lm/W        | <b>ULOR</b>              | 0%, <1%                                                                                                                                                              | <b>Lifetime L90B10 (hours)</b>  | > 90,000                                                                                                        |
| <b>Driver option</b> | Integral control gear | <b>CIE flux code n°3</b> | 97, 99                                                                                                                                                               | <b>Lifetime L80B10 (hours)</b>  | > 90,000                                                                                                        |
| <b>Driver</b>        | Constant current (CC) | <b>Dimming type</b>      | On/Off, 1-10V, DALI                                                                                                                                                  | <b>Lifetime L80B50 (hours)</b>  | > 90,000                                                                                                        |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    | <b>Product colours</b>   | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | <b>Variants (1-10V, DALI)</b>   | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| <b>Optic</b>         | M, W, EW, T2, T3, T4  |                          |                                                                                                                                                                      |                                 |                                                                                                                 |
|                      |                       | <b>Weight</b>            | 8.5 kg                                                                                                                                                               |                                 |                                                                                                                 |

### MS-91182

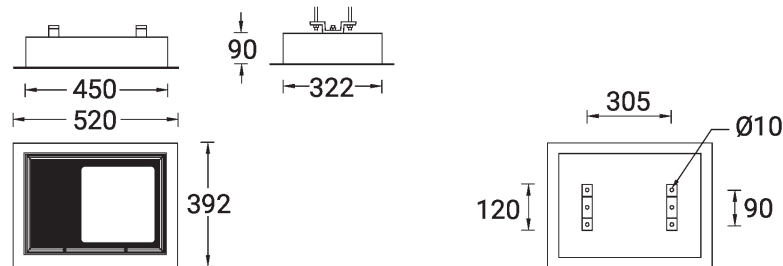

**MUSTANG 39** (MS-91182)

**Accessory**

---



DALI Control System  
**Control-DALI**

---