

STEAMER 1 (SE-90001-SU)



Product description


Rectangular - Medium




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Optic

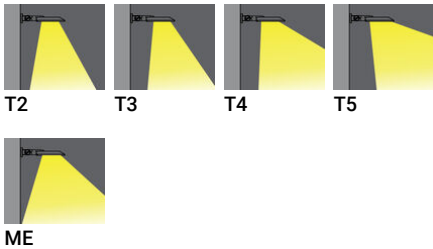

Product colour

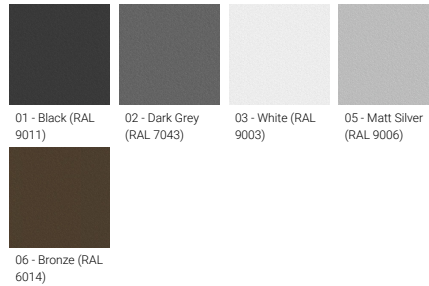

Special finishes upon request

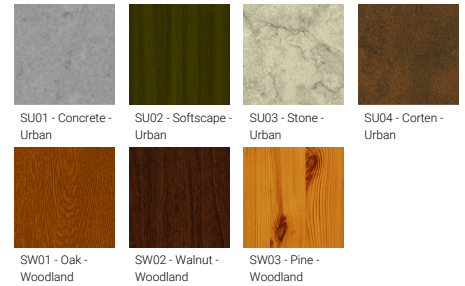

STEAMER 1 (SE-90001-SU)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Through wiring	Two cable entries for through wiring
Light source	9 LED	Optic	T2, T3, T4, T5, ME	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Power	80 W	Optic value	143°x48°, 142°x51°, 95°x84°, 88°x140°, 135°x49°	MacAdam Ellipse	3 SDCM
Lumen	6092 - 7999 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 109,000
Efficacy	76 - 100 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 109,000
Driver option	Integral control gear			Lifetime L80B50 (hours)	> 109,000
Driver	Constant current (CC)	Weight	10.1 kg	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
		Operating temperature	-20 °C to 50 °C		

SE-90001-SU

