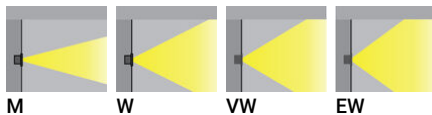


**AQUA 1** (AQ-60001) (Version 1)**Product description**

Without remote box IP-rated - With remote driver /  
recessing box - Constant current (CC) 700 mA

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in PVC is included
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

**Optic****Product colour**

00 - Stainless Steel

**AQUA 1 (AQ-60001) (Version 1)**


**Technical information**

<b>Material</b>	Stainless Steel
<b>Light source</b>	1 COB
<b>Power</b>	14 W
<b>Lumen</b>	881 - 1057 lm
<b>Efficacy</b>	63 - 76 lm/W
<b>Driver option</b>	Remote driver (included)
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	700 mA, 18 VDC
<b>Optic</b>	M, W, VW, EW

<b>Optic value</b>	33°, 42°, 53°, 67°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U0-G0
<b>ULR</b>	<1%
<b>ULOR</b>	<1%
<b>CIE flux code n°3</b>	100, 99
<b>Dimming type</b>	On/Off, 1-10V
<b>Product colours</b>	Stainless Steel
<b>Weight</b>	1.1 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 60,500
<b>Lifetime L80B10 (hours)</b>	> 60,500
<b>Lifetime L80B50 (hours)</b>	> 60,500

AQ-60001

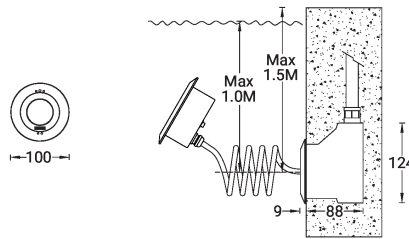

**AQUA 1** (AQ-60001) (Version 1)

**Accessory**

---



---

DALI Control System  
**Control-DALI**

---



---

Remote box IP65  
**A80291**

---