

ARDEN 3 (ARD-80234)



Product description

Down - 595 mm - RGBW



microPrim™


Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Down light distribution only

- Wireless control available through Bluetooth connection
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)


Optic



Product colour



Special finishes upon request

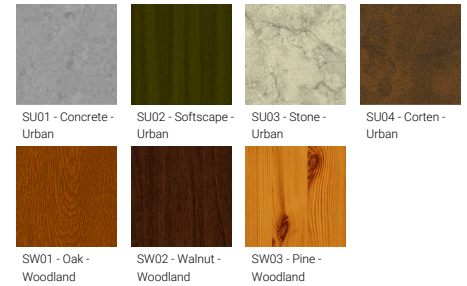

ARDEN 3 (ARD-80234)



Technical information


| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 2688 LED |
| Power | 84 W |
| Lumen | 2541 lm |
| Efficacy | 30 lm/W |
| Driver option | Integral control gear |

| | |
|----------------------|-----------------------|
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | O, P |
| Optic value | 108°, 93° |
| CCT / CRI | RGBW40 |
| Dimming type | Bluetooth |


| | |
|---------------------------------|---|
| Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 7.4 kg |
| Operating temperature | -20 °C to 40 °C |
| Lens / Reflector / Optic | PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control |
| Variants (Bluetooth) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

ARD-80234

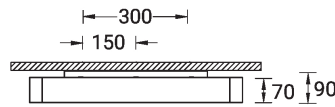


ARDEN 3 (ARD-80234)**Accessory**

Decorative pattern - Type A for
ARDEN 600 mm.
A91721



Decorative pattern - Type B for
ARDEN 600 mm
A93121



Decorative pattern - Type C for
ARDEN for ARDEN 600 mm
A94521



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI