

**LIGHTTALK 17** (LA-40032) (Version 1)



**Product description**

Without remote driver / recessing box - Constant voltage (CV) 24 V - 655 mm - Class III - RGBW




microPrim™


**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is not included
- 24 VDC input, DMX/RDM address with stable signal


**Optic**

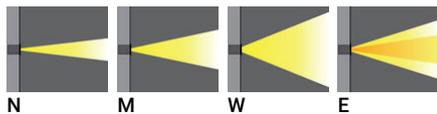

**Product colour**

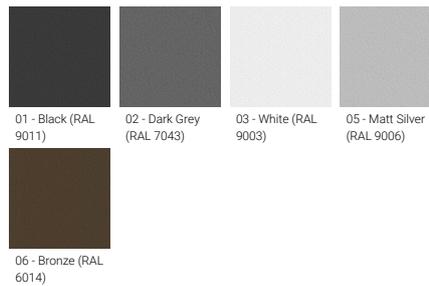

**Special finishes upon request**

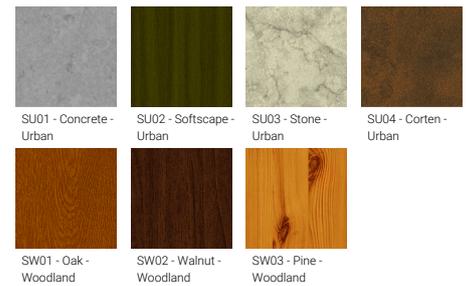


**LIGHTALK 17** (LA-40032) (Version 1)

**Technical information**

<b>Material</b>	Aluminium	<b>Driver</b>	Constant voltage (CV)	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Light source</b>	18 LED	<b>Input voltage</b>	24 VDC	<b>Weight</b>	4.0 kg
<b>Power</b>	35 W	<b>Optic</b>	N, M, W, E	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lumen</b>	905 - 1948 lm	<b>Optic value</b>	16°, 32°, 55°, 20°x30°	<b>Cable</b>	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
<b>Efficacy</b>	26 - 56 lm/W	<b>CCT / CRI</b>	RGB+Amber, RGBW30, RGBW40	<b>Through wiring</b>	Two cable entries for through wiring
<b>Driver option</b>	Remote driver (not included)	<b>Dimming type</b>	DMX, DMX/RDM	<b>Lens / Reflector / Optic</b>	Clear toughened glass

LA-40032

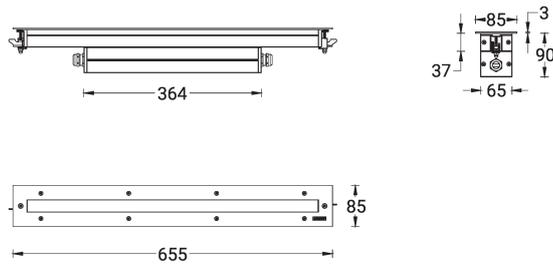

**LIGHTALK 17** (LA-40032) (Version 1)

**Accessory**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**



Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W - IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W - IP67 - 24 V  
**A34891-ND**



Recessing box  
**A41151**