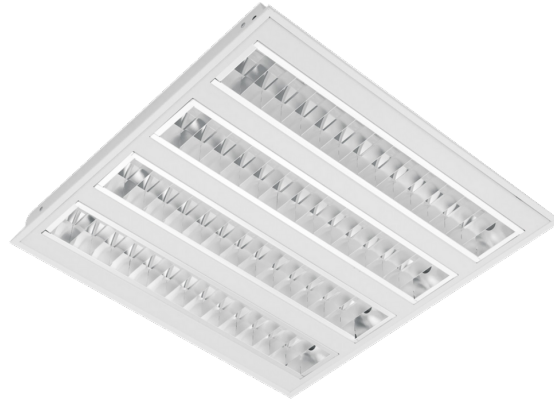


YORK 1 (YOK-80001)**Product description**

600x600 mm - Double parabolic louvre of mat aluminum with opal cover

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet
- UV & flame resistant, chemical & salt stable PVC
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Micro prismatic, opal, perforated cover and double parabolic louvre options
- Integral control gear

Product colour

YORK 1 (YOK-80001)


Technical information

Material	Aluminium
Light source	4 x 27 LED
Power	37 W
Lumen	4450 lm
Efficacy	120 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	G
Optic value	59°x82°
CCT / CRI	4000K CRI80
Bug	B2-U1-G0
ULR	<1%
ULOR	<1%

CIE flux code n°3	100
Dimming type	On/Off, DALI
Product colours	White
Weight	3.6 kg
Operating temperature	-20 °C to 40 °C
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

YOK-80001



YORK 1 (YOK-80001)

Accessory



DALI Control System
Control-DALI
