
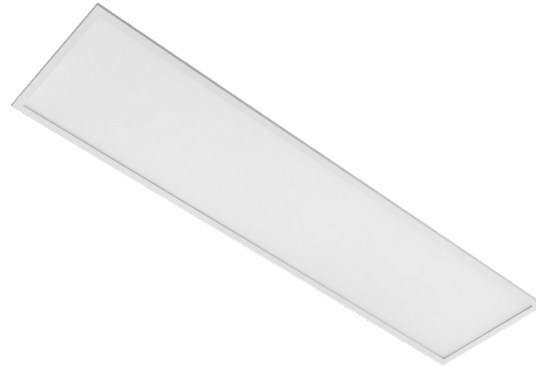



ARUBA 2 (ARU-80012)**Product description**

300x1200 mm

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet
- UV & flame resistant, chemical & salt stable PVC
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Micro prismatic PMMA diffuser for better glare control
- Remote driver (included)
- Recessed and surface mounted options
- Accessories: Aluminium frame for surface installation & Aluminium frame for recessed installation of fitting into gypsum plasterboard

Optic**P****Product colour**


03 - White (RAL 9003)

ARUBA 2 (ARU-80012)


Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	White
Light source	132 LED	Input voltage	220-240 V 50/60 Hz	Weight	4.2 kg
Power	38 W	Optic	P	Operating temperature	-20 °C to 40 °C
Lumen	3650 lm	Optic value	93°	Micro prismatic PMMA diffuser for better glare control	
Efficacy	96 lm/W	CCT / CRI	3000K CRI80, 4000K CRI80		
Driver option	Remote driver (included)	Dimming type	On/Off, DALI		

ARU-80012

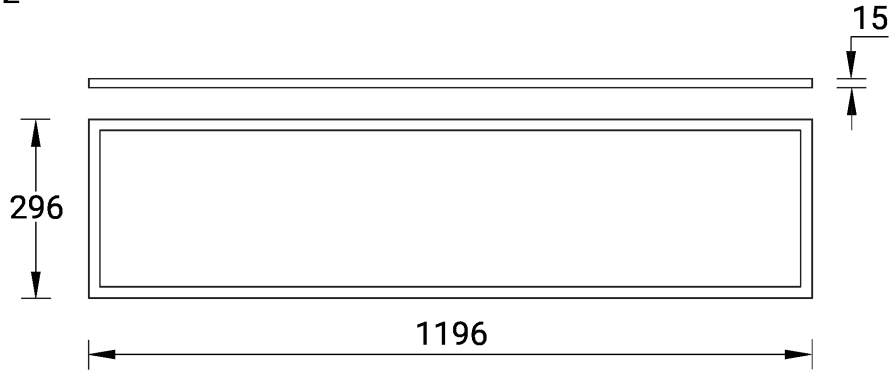

ARUBA 2 (ARU-80012)**Accessory**



Frame for recessed installation
of fittings into gypsum
plasterboard ceiling
RECTANGLE (White)
A83181



Frame for surface installation
RECTANGLE (White)
A83381



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI
