

DUOMO 7 (DU-30136-2-1)



Product description

Medium - Straight shade - Dome top




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible for DUOMO 6, DUOMO 7

Product colour

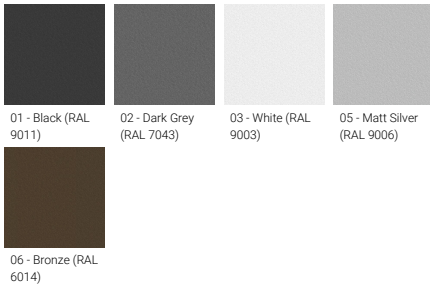

Special finishes upon request

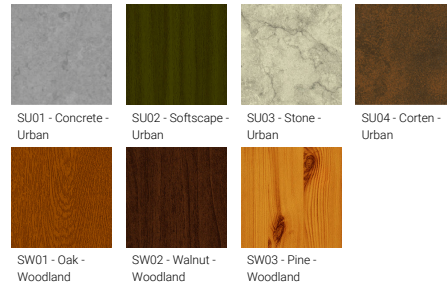

DUOMO 7 (DU-30136-2-1)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
Light source	1 COB	Optic value	128°			
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80			
Lumen	1763 - 1785 lm	Bug	B1-U3-G1			
Efficacy	43 - 44 lm/W	ULR	15%			
Driver option	Integral control gear	ULOR	15%			
Driver	Constant current (CC)	CIE flux code n°3	87			
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI			
					Weight	9.2 kg
					Operating temperature	-20 °C to 40 °C
				Through wiring	Two cable entries for through wiring	
				Lens / Reflector / Optic	Opal toughened glass diffuser	
				MacAdam Ellipse	3 SDCM	
				Lifetime L90B10 (hours)	> 55,000	
				Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	

DU-30136-2-1

