

LIGHTALK 2 (LA-60013)



Product description


With recessing box - Integral control gear - 655 mm - Class I - RGBW



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

Optic

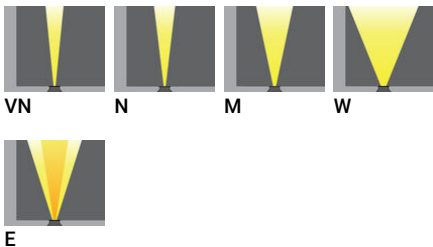

Product colour



LIGHTALK 2 (LA-60013)


Technical information

Material	Stainless Steel
Light source	20 LED
Power	33 W
Lumen	1592 - 1916 lm
Efficacy	48 - 58 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	VN, N, M, W, E

Optic value	10°, 13°, 24°, 43°, 16° x35°
CCT / CRI	RGBW30, RGBW40
Bug	B0-U5-G0
ULR	100%
ULOR	100%
Dimming type	DMX, DMX/RDM
Product colours	Stainless Steel
Weight	4.9 kg
Operating temperature	-20 °C to 40 °C

Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	7 SDCM
Lifetime L90B10 (hours)	> 50,000
Lifetime L80B10 (hours)	> 68,000
Lifetime L80B50 (hours)	> 100,000
Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LA-60013

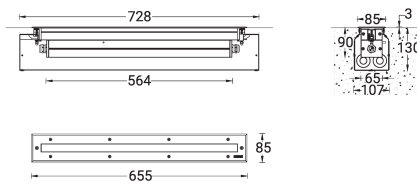

LIGHTALK 2 (LA-60013)

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM