


LEGEND 1 (LE-40721-A)



Product description

With recessing box - Aluminium frame



microPrim™



Luminaire Structure


- Available with interchangeable aluminium or stainless steel grade 316 frames
- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal high-efficiency PMMA diffuser
- Integral control gear

Optic




G

Product colour

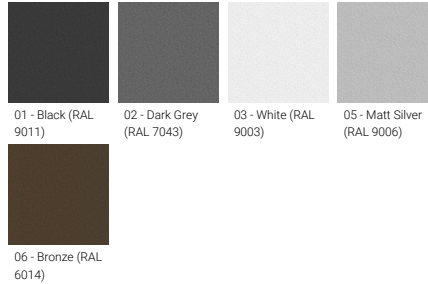

Special finishes upon request

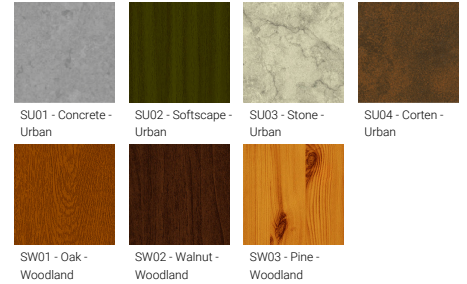

LEGEND 1 (LE-40721-A)


Technical information

Material	Aluminium
Light source	3 COB
Power	12 W
Lumen	550 - 578 lm
Efficacy	48 - 50 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	106°x102°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U2-G1
ULR	3%
ULOR	3%
CIE flux code n°3	92
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.3 kg
Operating temperature	-20 °C to 45 °C
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal high-efficiency PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 50,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LE-40721-A

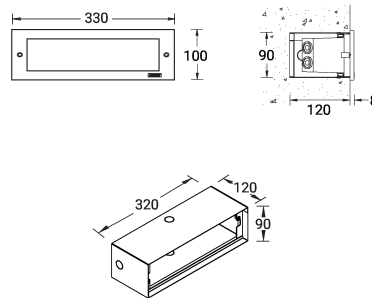

LEGEND 1 (LE-40721-A)

Accessory



DALI Control System
Control-DALI
