

ANESTI 1 (AN-20595)



Product description

Supplied with a cylindrical, straight aluminium pole -
Height options: 3 - 6 m



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear acrylic PMMA diffuser
- Integral control gear


- Driver is to be installed within the pole-head. Please contact the factory for pole compatibility.

Optic




G

Product colour

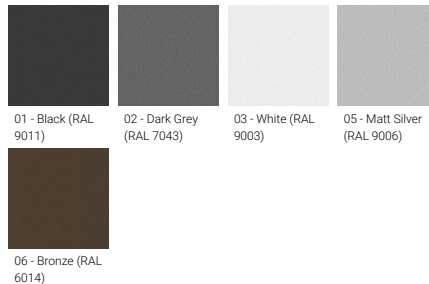

Special finishes upon request

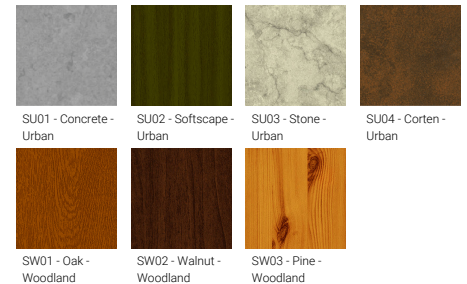

ANESTI 1 (AN-20595)


Technical information

Material	Aluminium
Light source	1 COB
Power	41 W
Lumen	956 - 1005 lm
Efficacy	23 - 25 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	360°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U3-G1
ULR	19%
ULOR	19%
CIE flux code n°3	76
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	26.9 kg
Operating temperature	-20 °C to 40 °C
EPA (m2)	0.160
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear acrylic PMMA diffuser
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

AN-20595

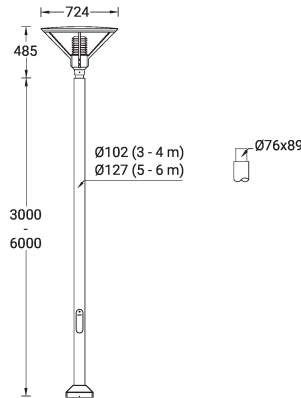

ANESTI 1 (AN-20595)**Accessory**

Circuit breaker box IP44
A21291



Root mount kit
A20491



Root mount kit
A20691



DALI Control System
Control-DALI



6 m - Cylindrical, straight
aluminium pole DIA. 127 mm
APD160127-ASP



5 m - Cylindrical, straight
aluminium pole DIA. 127 mm
APD150127-ASP



4 m - Cylindrical, straight
aluminium pole DIA. 102 mm
APD140102-ASP



3 m - Cylindrical, straight
aluminium pole DIA. 102 mm
APD130102-ASP