

ARIZONA 5 (AR-21051)



Product description

Top Ø225 mm - IK06



Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear acrylic PMMA diffuser
- Integral control gear

Optic



G

Product colour

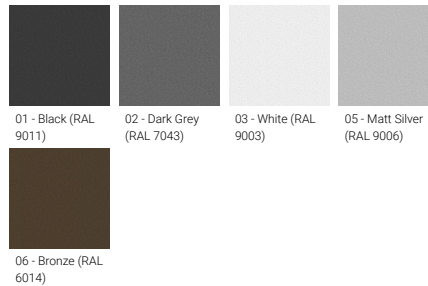

Special finishes upon request



ARIZONA 5 (AR-21051)


Technical information

Material	Aluminium
Light source	1 COB
Power	34 W
Lumen	2848 - 3123 lm
Efficacy	84 - 92 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G
Optic value	60°x69°

CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B2-U3-G1
ULR	3%
ULOR	3%
CIE flux code n°3	98
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	8.7 kg
Operating temperature	-20 °C to 40 °C
EPA (m2)	0.171

Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear acrylic PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 50,700
Lifetime L80B10 (hours)	> 63,500
Lifetime L80B50 (hours)	> 63,500
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

AR-21051

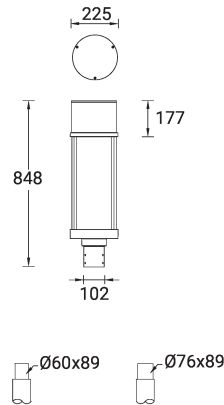

ARIZONA 5 (AR-21051)

Accessory



DALI Control System
Control-DALI
