

PRAGUE 1 (PRA-10001) (Version 2)



Product description

102x50 mm - 500 mm




microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

Optic

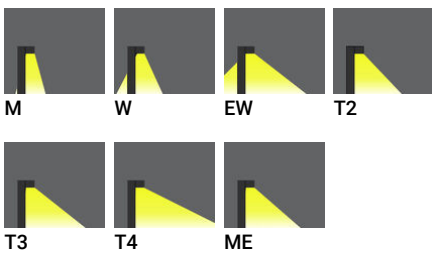

Product colour



Special finishes upon request



PRAGUE 1 (PRA-10001) (Version 2)


Technical information

Material	Aluminium
Light source	4 LED
Power	7 W
Lumen	576 - 790 lm
Efficacy	82 - 113 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW, T2, T3, T4, ME

Optic value	27°x19°, 31°x51°, 107°x69°, 128°x31°, 136°x58°, 112°x59°, 124°x39°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B0-U1-G0, B0-U2-G0, B0-U2-G1, B1-U2-G1
ULR	1%, 2%, 3%, 5%, 7%
ULOR	1%, 2%, 3%, 5%, 7%
CIE flux code n°3	96, 97, 98
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	3.0 kg

Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

PRA-10001

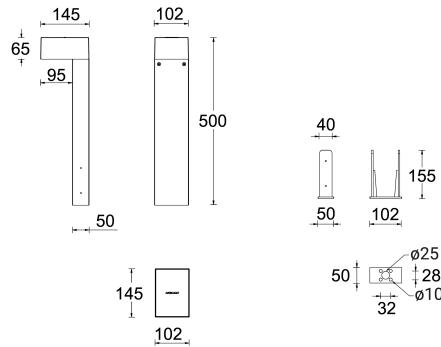

PRAGUE 1 (PRA-10001) (Version 2)**Accessory**



Anchor bolt
A13691
