

**STEAMER 2 (SE-90011-SU)**



**Product description**


Rectangular - Large




**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


**Optic**

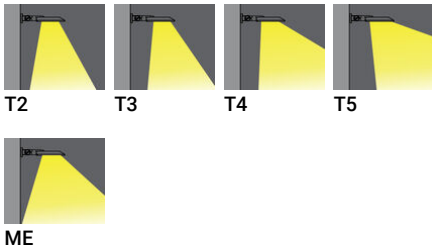

**Product colour**

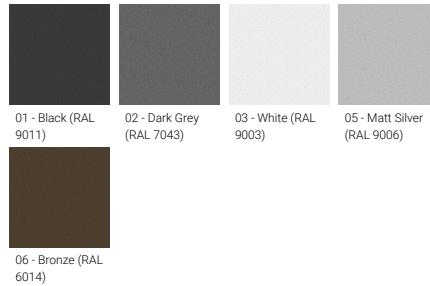

**Special finishes upon request**

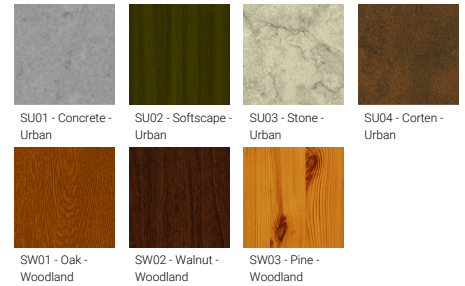

**STEAMER 2 (SE-90011-SU)**

**Technical information**

<b>Material</b>	Aluminium	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Through wiring</b>	Two cable entries for through wiring
<b>Light source</b>	18 LED	<b>Optic</b>	T2, T3, T4, T5, ME	<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens
<b>Power</b>	157 W	<b>Optic value</b>	142°x42°, 141°x47°, 95°x84°, 88°x140°, 136°x39°	<b>MacAdam Ellipse</b>	3 SDCM
<b>Lumen</b>	11398 - 15997 lm	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L90B10 (hours)</b>	> 109,000
<b>Efficacy</b>	73 - 102 lm/W	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B10 (hours)</b>	> 109,000
<b>Driver option</b>	Integral control gear			<b>Lifetime L80B50 (hours)</b>	> 109,000
<b>Driver</b>	Constant current (CC)			<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
		<b>Weight</b>	14.5 kg		
		<b>Operating temperature</b>	-20 °C to 50 °C		

SE-90011-SU

