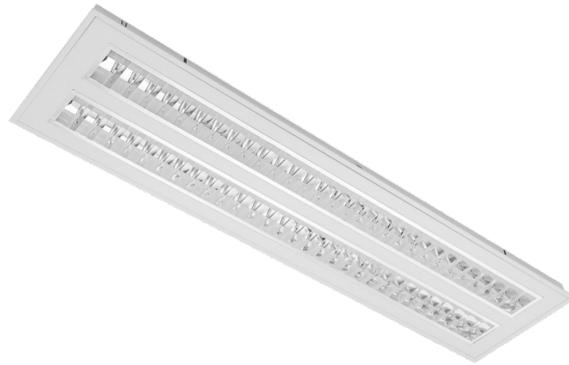


**YORK 2 (YOK-80011)****Product description**

300x1200 mm - Double parabolic louvre of highly polished aluminum with opal cover

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet
- UV & flame resistant, chemical & salt stable PVC
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Micro prismatic, opal, perforated cover and double parabolic louvre options
- Integral control gear


**Product colour**

**YORK 2 (YOK-80011)**

**Technical information**

<b>Material</b>	Aluminium	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>CIE flux code n°3</b>	100
<b>Light source</b>	2 x 54 LED	<b>Optic</b>	G	<b>Dimming type</b>	On/Off, DALI
<b>Power</b>	27 W	<b>Optic value</b>	56°x79°	<b>Product colours</b>	White
<b>Lumen</b>	3300 lm	<b>CCT / CRI</b>	4000K CRI80	<b>Weight</b>	4.4 kg
<b>Efficacy</b>	122 lm/W	<b>Bug</b>	B2-U1-G0	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Driver option</b>	Integral control gear	<b>ULR</b>	<1%	<b>Variants (On/Off)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Driver</b>	Constant current (CC)	<b>ULOR</b>	<1%		

YOK-80011

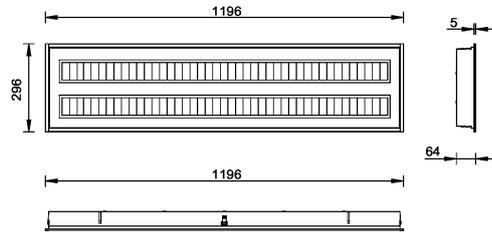

**YORK 2** (YOK-80011)

**Accessory**

---



DALI Control System  
**Control-DALI**

---