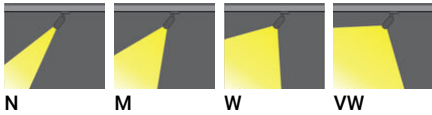



BELIZE 3 (BEZ-80022)**Product description**

Ø90 - 274 mm

**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Adjustable: Tilt 180°, Rotation 360°
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- High-efficiency optical reflector or high-efficiency polycarbonate lens
- Integral control gear
- With 3-phase universal adapter

Optic**Product colour**

BELIZE 3 (BEZ-80022)


Technical information

Material	Aluminium
Light source	1 COB
Power	43 W
Lumen	3396 - 3929 lm
Efficacy	79 - 91 lm/W
Driver option	Integral control gear

Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW
Optic value	28°, 38°, 53°, 60°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, DALI


Product colours	Black, White
Weight	1.0 kg
Operating temperature	-20 °C to 50 °C
Lens / Reflector / Optic	High-efficiency optical reflector or high-efficiency polycarbonate lens

BEZ-80022

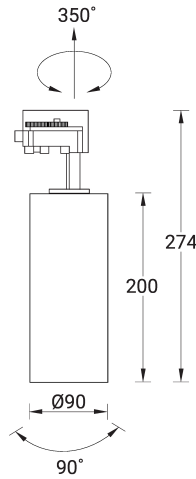

BELIZE 3 (BEZ-80022)

Accessory



Honeycomb louvre
A80118



Surface mounted track adapter -
Black DA
A80119



Surface mounted track adapter -
White DA
A80120



Surface mounted track adapter -
Black ND
A80122



Surface mounted track adapter -
White ND
A80123
