

ODESSA 2 (OD-21035) (Version 2)



Product description

Medium - Supplied with specific 8 m cylindrical, tapered galvanised steel pole: SPT180176-OD




microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- RGBW available upon request


Optic



Product colour



Special finishes upon request

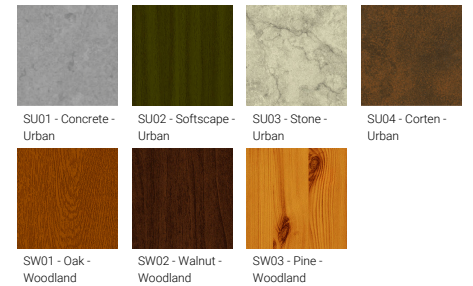

ODESSA 2 (OD-21035) (Version 2)**Accessory**



Anti-glare visor
A80131



Anti-glare louvre
A80231



Linear spread lens
A80114



Root mount kit
A21191

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)



8 m - Cylindrical, tapered
galvanised steel pole for
ODESSA
SPT180176-OD