

LIGHT LINEAR PT 5 (LI-21183)



Product description

2 sides - Supplied with specific square, straight aluminium pole - Height options: 3 - 6 m



Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV

Optic




T2 T3 T4

Product colour

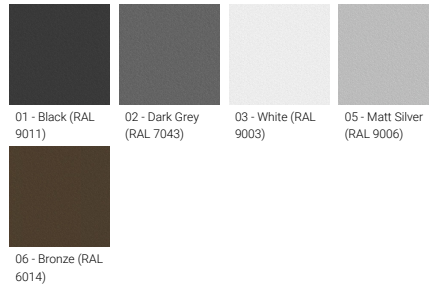

01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)
06 - Bronze (RAL 6014)

Special finishes upon request

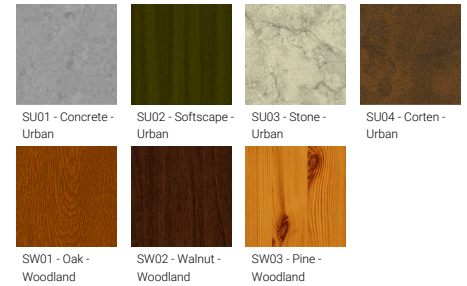

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban
SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

LIGHT LINEAR PT 5 (LI-21183)

Accessory



Motion sensor - PIR - 1-10V - Up to 3 m
A90191-L2



Motion sensor - PIR - 1-10V - Up to 6 m
A90191-L3



Motion sensor - PIR - 1-10V - Up to 12 m
A90191-L7



Root mount kit
A20891



Circuit breaker box IP44
A21291



Internal cable support for pole 3 m
A23991



Internal cable support for pole 4 m
A24091



Internal cable support for pole 5 m
A24191



Internal cable support for pole 6 m
A24291



Remote controller for the motion sensor - 1-10V (A90191)
A90791



DALI Control System
Control-DALI

Pole (required)



3 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
APC230090-PT5-LI-21183



4 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
APC240090-PT5-LI-21183



5 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
APC250090-PT5-LI-21183



6 m - Square, straight aluminium pole for LIGHT LINEAR PT - 2 sides
APC260090-PT5-LI-21183