

**PITTSBURGH 5 (PIB-30015)**



**Product description**

Medium - RGBW




microPrim™


**Luminaire Structure**

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Surge protection 10kV


**Optic**

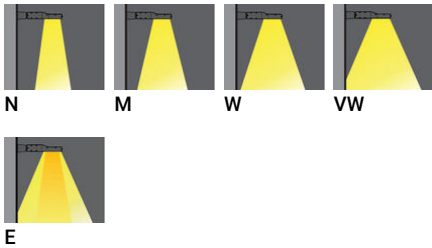

**Product colour**

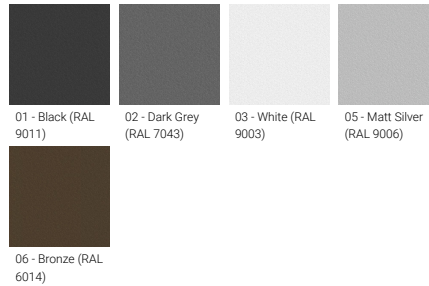

**Special finishes upon request**

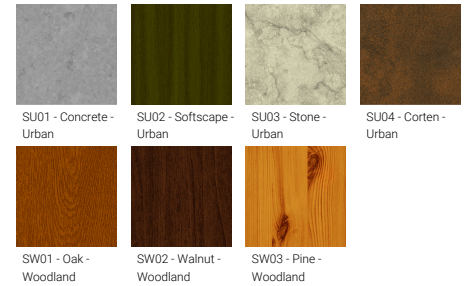

**PITTSBURGH 5 (PIB-30015)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	2 x 36 LED
<b>Power</b>	120 W
<b>Lumen</b>	5660 - 7244 lm
<b>Efficacy</b>	47 - 60 lm/W
<b>Driver option</b>	Integral control gear

<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	N, M, W, VW, E
<b>Optic value</b>	9°, 16°, 33°, 64°, 43°x10°
<b>CCT / CRI</b>	RGBW30, RGBW40
<b>Dimming type</b>	DMX/RDM

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	13.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency polycarbonate lens

PIB-30015

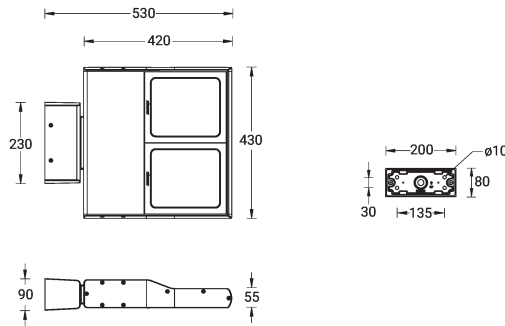

**PITTSBURGH 5** (PIB-30015)

**Accessory**

---



DMX/RDM Control System  
**Control-DMX-RDM**

---