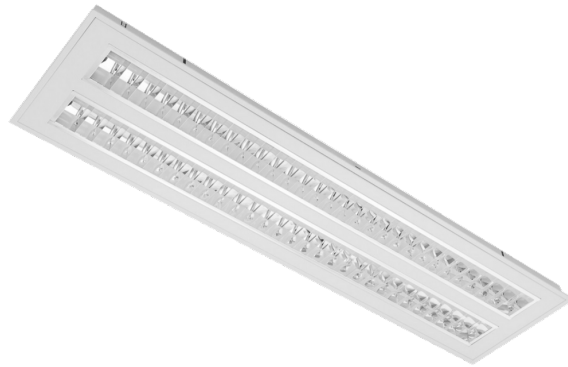


YORK 2 (YOK-80011)**Product description**

300x1200 mm - Double parabolic louvre of highly polished aluminum with opal cover

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet
- UV & flame resistant, chemical & salt stable PVC
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Micro prismatic, opal, perforated cover and double parabolic louvre options
- Integral control gear


Product colour

YORK 2 (YOK-80011)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	100
Light source	2 x 54 LED	Optic	G	Dimming type	On/Off, DALI
Power	27 W	Optic value	56°x79°	Product colours	White
Lumen	3300 lm	CCT / CRI	4000K CRI80	Weight	4.4 kg
Efficacy	122 lm/W	Bug	B2-U1-G0	Operating temperature	-20 °C to 40 °C
Driver option	Integral control gear	ULR	<1%	Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	ULOR	<1%		

YOK-80011

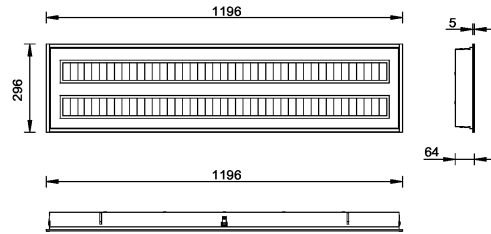

YORK 2 (YOK-80011)

Accessory



DALI Control System
Control-DALI
