

LIGHTTALK 10 (LA-40013)



Product description

Without recessing box - Integral control gear - 655 mm
 - Class I - RGBW




microPrim™


Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is not included
- 24 VDC input, DMX/RDM address with stable signal


Optic

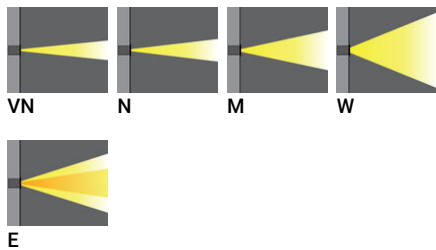

Product colour

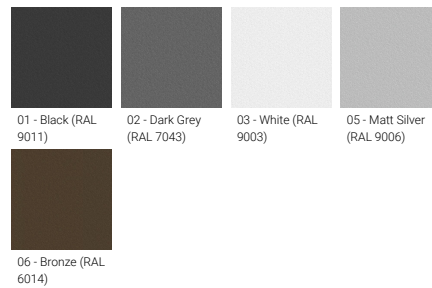

Special finishes upon request

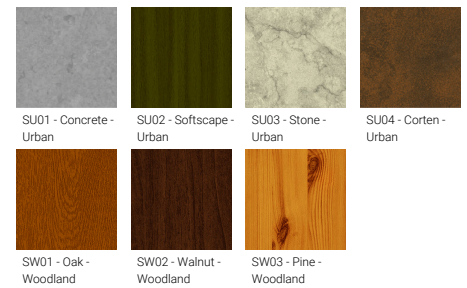

LIGHTALK 10 (LA-40013)


Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 20 LED |
| Power | 33 W |
| Lumen | 1592 - 1916 lm |
| Efficacy | 48 - 58 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | VN, N, M, W, E |

| | |
|--------------------------|--|
| Optic value | 10°, 13°, 24°, 43°, 16° x35° |
| CCT / CRI | RGBW30, RGBW40 |
| Bug | B2-U1-G0 |
| ULR | 0% |
| ULOR | 0% |
| CIE flux code n°3 | 100 |
| Dimming type | DMX, DMX/RDM |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 4.3 kg |

| | |
|---------------------------------|---|
| Operating temperature | -20 °C to 40 °C |
| Cable | Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable |
| Through wiring | Two cable entries for through wiring |
| Lens / Reflector / Optic | Clear toughened glass |
| MacAdam Ellipse | 7 SDCM |
| Lifetime L90B10 (hours) | > 50,000 |
| Lifetime L80B10 (hours) | > 68,000 |
| Lifetime L80B50 (hours) | > 100,000 |
| Variants (DMX/RDM) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

LA-40013

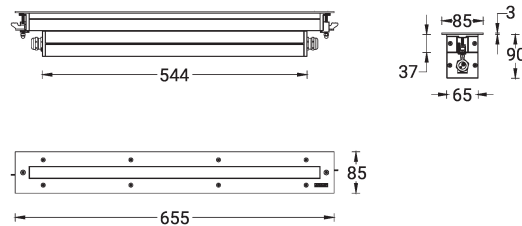

LIGHTTALK 10 (LA-40013)

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Recessing box
A41151
