

**ARGENTINA 1** (ARG-20001) (Version 1)



**Product description**

Top Ø742 mm - Supplied with a cylindrical, straight aluminium pole - Height options: 3 - 6 m



microPrim™

**Luminaire Structure**


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- 1 standard decorative pattern, other patterns upon request
- Driver is to be installed within the pole-head. Please contact the factory for pole compatibility.

**Optic**




G

**Product colour**

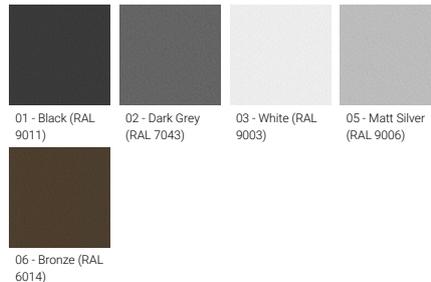

**Special finishes upon request**

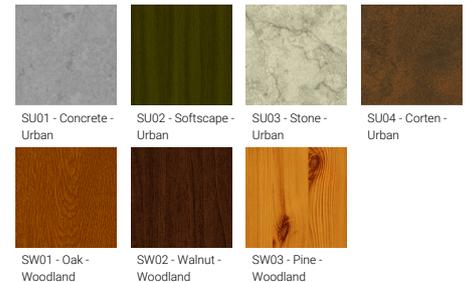


**ARGENTINA 1** (ARG-20001) (Version 1)

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	624 LED
<b>Power</b>	109 W
<b>Lumen</b>	9118 - 9598 lm
<b>Efficacy</b>	84 - 88 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240V 50/60Hz

<b>Optic</b>	G
<b>Optic value</b>	360°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B3-U2-G2
<b>ULR</b>	<1%
<b>ULOR</b>	<1%
<b>CIE flux code n°3</b>	96
<b>Dimming type</b>	On/Off, 1-10V, DALI

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	20.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>EPA (m2)</b>	0.242
<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Opal UV-stabilised polycarbonate diffuser
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

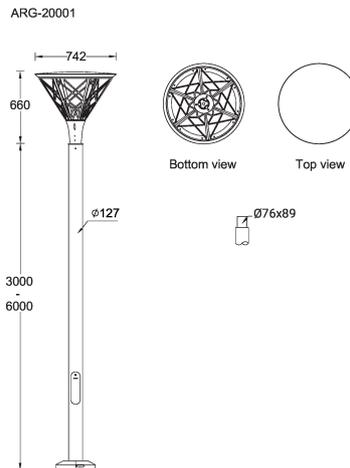

**ARGENTINA 1** (ARG-20001) (Version 1)**Accessory**

Root mount kit  
**A20691**



Circuit breaker box IP44  
**A21291**



Root mount kit  
**A20491**



6 m - Cylindrical, straight  
aluminium pole DIA. 127 mm  
**APD160127-ASP**



5 m - Cylindrical, straight  
aluminium pole DIA. 127 mm  
**APD150127-ASP**



3 m - Cylindrical, straight  
aluminium pole for ARGENTINA  
**APD130127-ASP**



4 m - Cylindrical, straight  
aluminium pole for ARGENTINA  
**APD140127-ASP**