

NIKON 5 (NI-80042-A)



Product description


Integral control gear - Round - Aluminium frame




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in stainless steel or aluminium
- Single cable entry, through wiring upon request
- One cable gland supplied with 1.5 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

Optic



Product colour

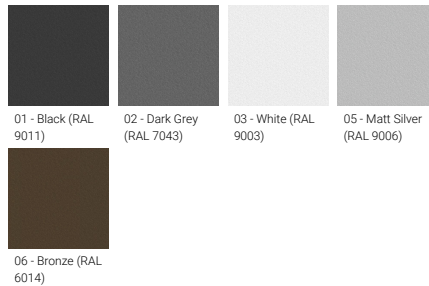

NIKON 5 (NI-80042-A)


Technical information

Material	Aluminium
Light source	MR16-GU10
Power	8 W
Lumen	369 - 455 lm
Efficacy	49 - 61 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	N, M, VW, E
Optic value	10°, 25°, 60°, 10°x60°
CCT / CRI	3000K CRI95, 4000K CRI95
Bug	B0-U1-G0, B1-U1-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off

Product colours	Black, Dark Grey, White, Matt Silver, Bronze
Weight	0.5 kg
Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 1.5 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	Clear toughened glass

NI-80042-A

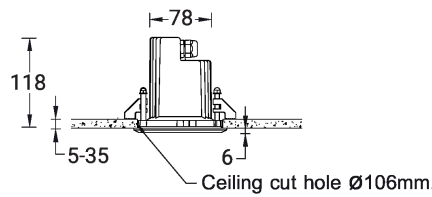

NIKON 5 (NI-80042-A)**Accessory**



Concrete box modification upon
request

CONCRETE-BOX
