

**BORNHOLM 2** (BOH-60011) (Version 2)



**Product description**


Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 700 mA



**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in stainless steel 316 grade
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length
- Maximum distance of the Remote DMX/RDM decoder is 8 m

**Optic**

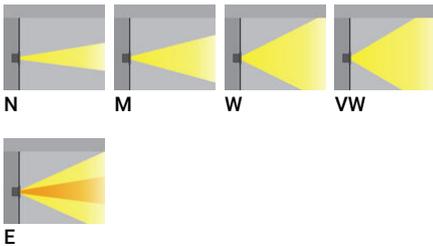

**Product colour**




**BORNHOLM 2** (BOH-60011) (Version 2)

**Technical information**


<b>Material</b>	Stainless Steel	<b>Optic value</b>	10°, 17°, 34°, 71°x56°, 42°x12°	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	4 LED	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Cable</b>	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
<b>Power</b>	11 W	<b>Bug</b>	B1-U0-G0, B2-U0-G0	<b>Through wiring</b>	Single cable entry
<b>Lumen</b>	799 - 1063 lm	<b>ULR</b>	<1%	<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>Efficacy</b>	73 - 97 lm/W	<b>ULOR</b>	<1%	<b>MacAdam Ellipse</b>	3 SDCM
<b>Driver option</b>	Remote driver (included)	<b>CIE flux code n°3</b>	100	<b>Lifetime L90B10 (hours)</b>	> 120,000
<b>Driver</b>	Constant current (CC)	<b>Dimming type</b>	On/Off, 1-10V	<b>Lifetime L80B10 (hours)</b>	> 120,000
<b>Input voltage</b>	700 mA, 12 VDC	<b>Product colours</b>	Stainless Steel	<b>Lifetime L80B50 (hours)</b>	> 120,000
<b>Optic</b>	N, M, W, VW, E	<b>Weight</b>	1.6 kg	<b>Variants (1-10V)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BOH-60011

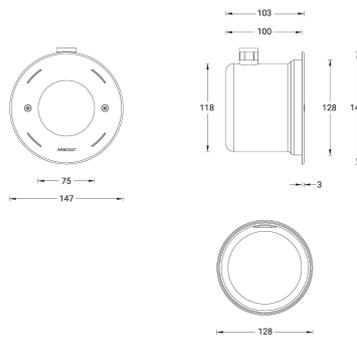

**BORNHOLM 2** (BOH-60011) (Version 2)**Accessory**

---



---

Honeycomb louvre  
**A52321**

---



---

Remote box IP65  
**A80191**

---