

LIGHTALK 13 (LA-95033) (Version 1)



Product description

Without remote driver - Constant voltage (CV) 24 V - 1205 mm - Class III




microPrim™


Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable


Optic

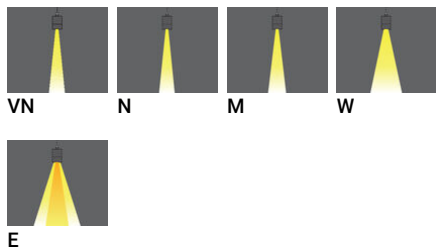

Product colour

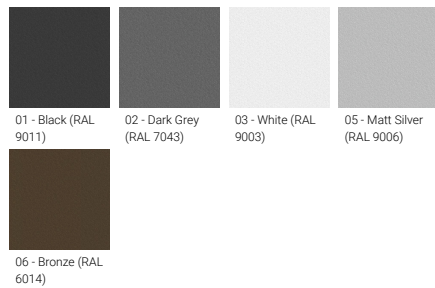

Special finishes upon request

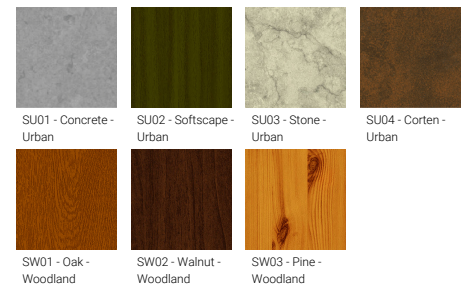

LIGHTALK 13 (LA-95033) (Version 1)


Technical information

Material	Aluminium
Light source	36 LED
Power	51 W
Lumen	3871 - 4975 lm
Efficacy	76 - 98 lm/W
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC

Optic	VN, N, M, W, E
Optic value	13°, 15°, 25°, 43°, 22° x 36°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U1-G0, B3-U1-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off


Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	4.0 kg
Operating temperature	-20 °C to 40 °C
EPA (m2)	0.062
Cable	Two IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass

LA-95033

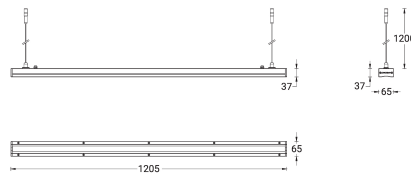

LIGHTALK 13 (LA-95033) (Version 1)**Accessory**


Cable - Connector IP67 Female 2
Pin Power - 1000 mm
A65491-001



Cable - Connector IP67 Female 2
Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female +
Male 2 Pin Power - 1000 mm
A65591-001

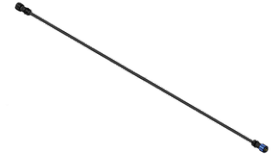

Cable - Connector IP67 Female +
Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin
Power
A68191



Connector IP67 Male 2 Pin
Power
A68291



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND