

**LIGHT LINEAR VT 1 (VT-10002)**



**Product description**

200x80 mm - 1000 mm - 1 side




microPrim™


**Luminaire Structure**

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

**Optic**

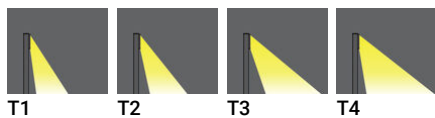

**Product colour**

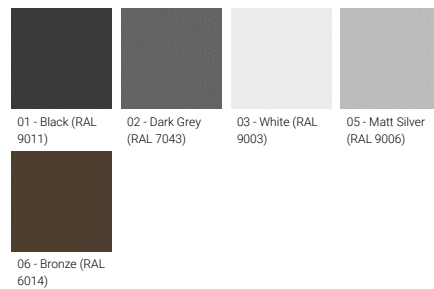

**Special finishes upon request**



**LIGHT LINEAR VT 1 (VT-10002)**


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 24 LED                |
| <b>Power</b>         | 52 W                  |
| <b>Lumen</b>         | 3974 - 5287 lm        |
| <b>Efficacy</b>      | 76 - 102 lm/W         |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    |
| <b>Optic</b>         | T1, T2, T3, T4        |

|                          |  |
|--------------------------|--|
| <b>Optic value</b>       | 104°x34°, 135°x35°, 94°x61°, 44°x21°   |
| <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80   |
| <b>Bug</b>               | B0-U3-G3, B0-U3-G4, B0-U4-G5   |
| <b>ULR</b>               | 15%, 16%, 20%  |
| <b>ULOR</b>              | 15%, 16%, 20%  |
| <b>CIE flux code n°3</b> | 69, 79, 80, 83   |
| <b>Dimming type</b>      | On/Off   |
| <b>Product colours</b>   | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>            | 8.9 kg   |


|                                 |   |
|---------------------------------|---|
| <b>Operating temperature</b>    | -20 °C to 40 °C   |
| <b>Cable</b>                    | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable  |
| <b>Through wiring</b>           | Single cable entry  |
| <b>Lens / Reflector / Optic</b> | Clear toughened glass, High-efficiency PMMA lens  |
| <b>MacAdam Ellipse</b>          | 3 SDCM  |
| <b>Lifetime L90B10 (hours)</b>  | > 90,000  |
| <b>Lifetime L80B10 (hours)</b>  | > 90,000  |
| <b>Lifetime L80B50 (hours)</b>  | > 90,000  |
| <b>Variants (On/Off)</b>        | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

VT-10002

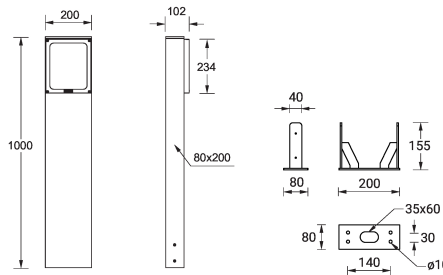

**LIGHT LINEAR VT 1** (VT-10002)**Accessory**

---



---

Anchor bolt  
**A11191**

---