

ATLANTIC 10 (AA-30640-2-2)



Product description

Shepherd's crook - Large - Straight shade - Cone top - IP65




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear


Optic

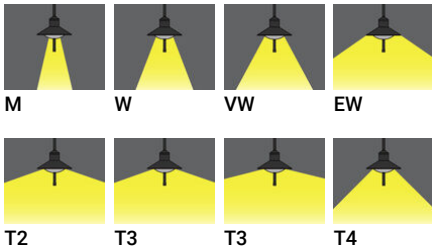

Product colour

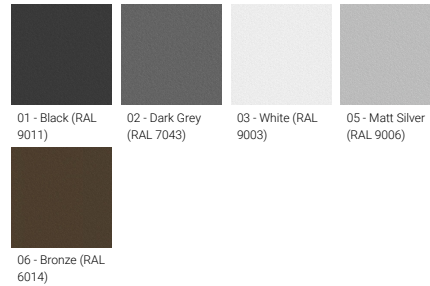

Special finishes upon request

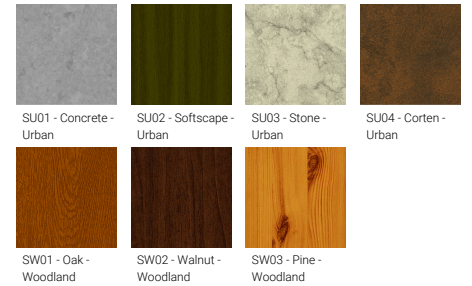

ATLANTIC 10 (AA-30640-2-2)

Technical information

Material	Aluminium	Optic value	30°, 52°, 66°, 122°, 141°x51°, 141°x67°, 98°x69°	Operating temperature	-20 °C to 40 °C
Light source	24 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	Opal toughened glass diffuser
Power	40 W	Bug	B1-U1-G1, B2-U1-G0, B3-U1-G0	MacAdam Ellipse	3 SDCM
Lumen	3429 - 4222 lm	ULR	<1%	Lifetime L90B10 (hours)	> 90,000
Efficacy	86 - 106 lm/W	ULOR	<1%	Lifetime L80B10 (hours)	> 90,000
Driver option	Integral control gear	CIE flux code n°3	96, 99	Lifetime L80B50 (hours)	> 90,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
Optic	M, W, VW, EW, T2, T3, T4	Weight	13.5 kg		

AA-30640-2-2

