

GINO 6 (GI-10007)



Product description

210x300 mm - 1000 mm - 2 sides




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


Optic



Product colour

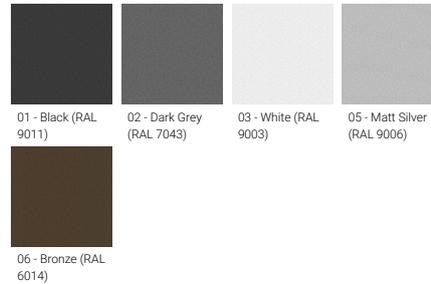

Special finishes upon request

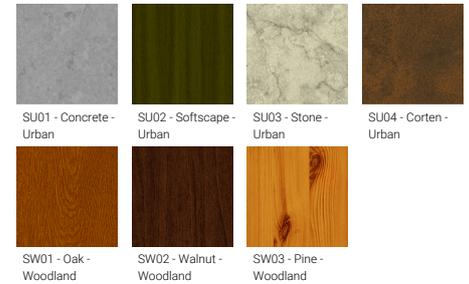

GINO 6 (GI-10007)

Technical information

Material	Aluminium
Light source	2 x 4 LED
Power	19 W
Lumen	1390 - 1658 lm
Efficacy	73 - 87 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	T2, T3, T4

Optic value	141°x49°, 139°x66°, 98°x76°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B0-U0-G0
ULR	0%, <1%
ULOR	0%, <1%
CIE flux code n°3	97, 98
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	10.0 kg

Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

Accessory



Anchor bolt
A11191
