

**LADOR 25 (LD-50131)**



**Product description**

Thread knuckle mounted - 83x83 mm



microPrim™


**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Adjustable: Tilt 80° (Up) & 40° (Down), Rotation 350°

- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear


**Optic**

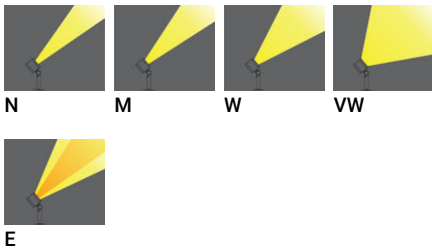

**Product colour**



**Special finishes upon request**

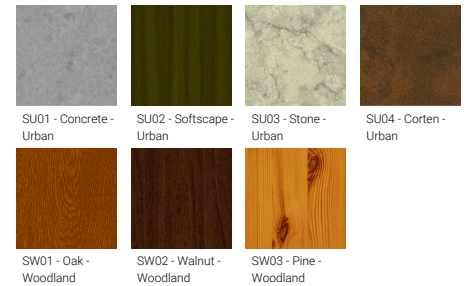

**LADOR 25 (LD-50131)**

**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 4 LED                 |
| <b>Power</b>         | 11 W                  |
| <b>Lumen</b>         | 686 - 904 lm          |
| <b>Efficacy</b>      | 62 - 82 lm/W          |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    |
| <b>Optic</b>         | N, M, W, VW, E        |

|                          |  |
|--------------------------|--|
| <b>Optic value</b>       | 10°, 19°, 33°, 71°, 41°x14°  |
| <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80   |
| <b>Bug</b>               | B1-U1-G0   |
| <b>ULR</b>               | 0%, <1%  |
| <b>ULOR</b>              | 0%, <1%  |
| <b>CIE flux code n°3</b> | 100  |
| <b>Dimming type</b>      | On/Off   |
| <b>Product colours</b>   | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>            | 1.7 kg   |


|                                 |   |
|---------------------------------|---|
| <b>Operating temperature</b>    | -20 °C to 40 °C   |
| <b>Through wiring</b>           | Single cable entry  |
| <b>Lens / Reflector / Optic</b> | High-efficiency PMMA lens, Clear toughened glass  |
| <b>MacAdam Ellipse</b>          | 3 SDCM  |
| <b>Lifetime L90B10 (hours)</b>  | > 120,000   |
| <b>Lifetime L80B10 (hours)</b>  | > 120,000   |
| <b>Lifetime L80B50 (hours)</b>  | > 120,000   |
| <b>Variants (On/Off)</b>        | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

**LADOR 25 (LD-50131)****Accessory**

---



Anti-glare visor  
**A53031**



Honeycomb louvre  
**A52021**



Linear spread lens  
**A51314**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.