

**OTTAWA 4 (OT-20961)**



**Product description**

Ø160 - 4000 mm




microPrim™


**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

**Product colour**

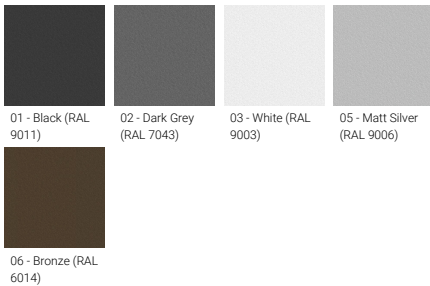

**Special finishes upon request**

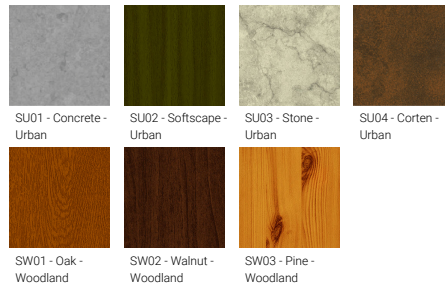

**OTTAWA 4 (OT-20961)**


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 1 COB                 |
| <b>Power</b>         | 20 W                  |
| <b>Lumen</b>         | 1960 - 2108 lm        |
| <b>Efficacy</b>      | 98 - 105 lm/W         |
| <b>Driver option</b> | Integral control gear |

|                              |  |
|------------------------------|--|
| <b>Driver</b>                | Constant current (CC)  |
| <b>Input voltage</b>         | 220-240 V 50/60 Hz   |
| <b>CCT / CRI</b>             | 3000K CRI80, 4000K CRI80   |
| <b>Product colours</b>       | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>                | 23.4 kg  |
| <b>Operating temperature</b> | -20 °C to 40 °C  |

|                                 |   |
|---------------------------------|---|
| <b>Cable</b>                    | One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable  |
| <b>Through wiring</b>           | Single cable entry  |
| <b>Lens / Reflector / Optic</b> | High-efficiency optical reflector, Clear toughened glass  |
| <b>MacAdam Ellipse</b>          | 3 SDCM  |
| <b>Lifetime L90B10 (hours)</b>  | > 61,000  |
| <b>VARIANTS</b>                 | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

OT-20961

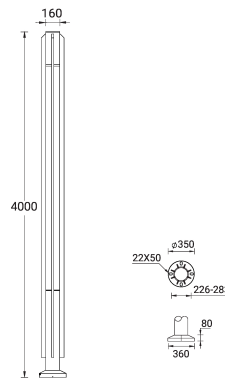

**OTTAWA 4** (OT-20961)**Accessory**

---



Root mount kit  
**A20691**



Circuit breaker box IP44  
**A21291**



DALI Control System  
**Control-DALI**