


STEAMER 11 (SE-90021-SU)



Product description


Round - Medium




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Optic

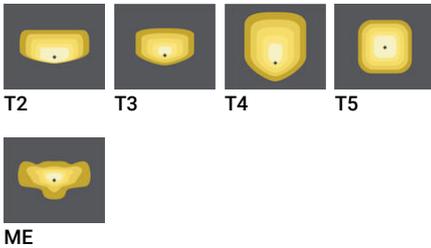

Product colour

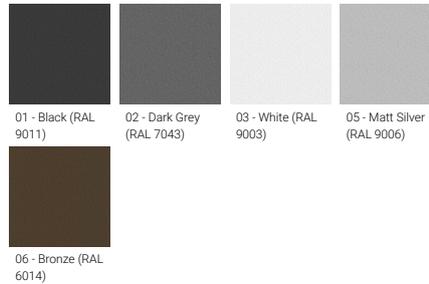

Special finishes upon request

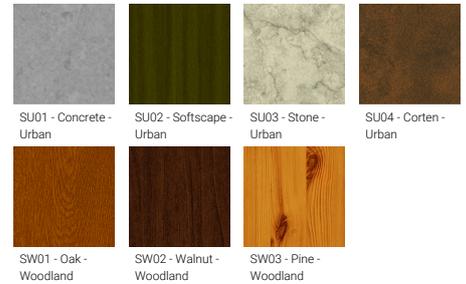

STEAMER 11 (SE-90021-SU)

Technical information

| | | | | | |
|----------------------|-----------------------|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Material | Aluminium | Input voltage | 220-240 V 50/60 Hz | Through wiring | Two cable entries for through wiring |
| Light source | 9 LED | Optic | T2, T3, T4, T5, ME | Lens / Reflector / Optic | Clear toughened glass, High-efficiency PMMA lens |
| Power | 80 W | Optic value | 143°x48°, 142°x51°, 95°x84°, 88°x140°, 135°x49° | MacAdam Ellipse | 3 SDCM |
| Lumen | 6092 - 7999 lm | Dimming type | On/Off, 1-10V, DALI | Lifetime L90B10 (hours) | > 109,000 |
| Efficacy | 76 - 100 lm/W | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | Lifetime L80B10 (hours) | > 109,000 |
| Driver option | Integral control gear | | | Lifetime L80B50 (hours) | > 109,000 |
| Driver | Constant current (CC) | Weight | 10.1 kg | Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| | | Operating temperature | -20 °C to 50 °C | | |

SE-90021-SU

