

ARIZONA 3 (AR-20993-LC)



Product description


Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-AR-20993 - 3 projectors - LIGHTCONNECT™




Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser
- Integral control gear
- Maximum wind load resistance is 140 km/h
- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.


Optic



Product colour

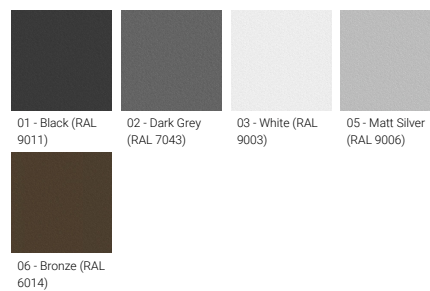

Special finishes upon request

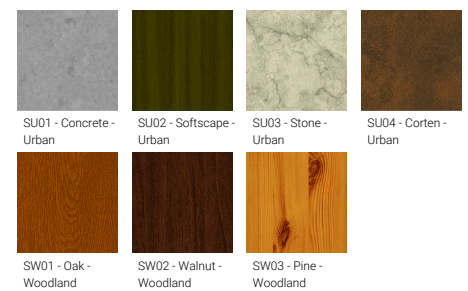

ARIZONA 3 (AR-20993-LC)


Technical information

Material	Aluminium
Light source	3 x 24 LED
Power	114 W
Lumen	10902 - 12795 lm
Efficacy	96 - 112 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W

Optic value	15°, 24°, 39°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U1-G0, B3-U1-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	99
Dimming type	DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	42.0 kg

Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear acrylic PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 120,000
Lifetime L80B10 (hours)	> 120,000
Lifetime L80B50 (hours)	> 120,000
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

AR-20993

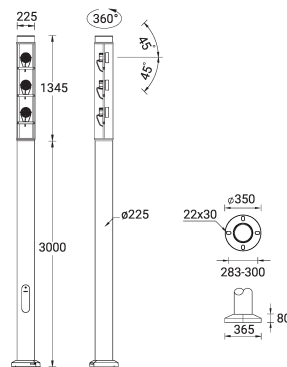

ARIZONA 3 (AR-20993-LC)**Accessory**

Root mount kit
A20791



Circuit breaker box IP44
A21291



NEMA 7 socket
A90891



Zhaga Book 18 socket (Up)
A90991-U




DALI Control System
Control-DALI



Smart Pole Accessories
Accs-Smart-Pole



Linear spread lens
A20214



Anti-glare visor
A20261

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)

3 m - Cylindrical, straight
aluminium pole for ARIZONA
APD130225-AR-20992