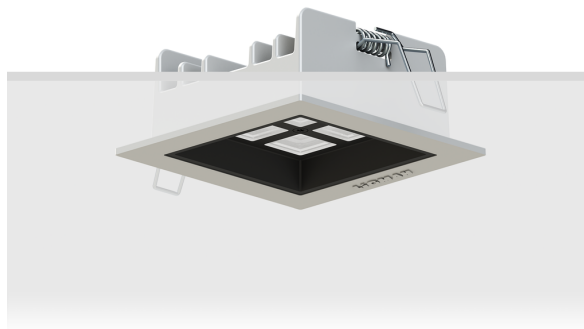



BRIGHTON 4 (BRI-80002)**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- High-efficiency PMMA lens
- Remote driver (included)
- Toolless flush-mount installation for 1-25 mm false ceilings
- Modular design for easy installation

Optic

M W EW

Product colour

08 - Glossy White (RAL 9010) 09 - Glossy Black (HB451022M)

BRIGHTON 4 (BRI-80002)


Technical information

Material	Aluminium
Light source	4 LED
Power	14 W
Lumen	1049 - 1420 lm
Efficacy	81 - 109 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW

Optic value	30°, 56°, 91°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V
Product colours	Glossy White, Glossy Black
Weight	0.6 kg

Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off, 1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BRI-80002

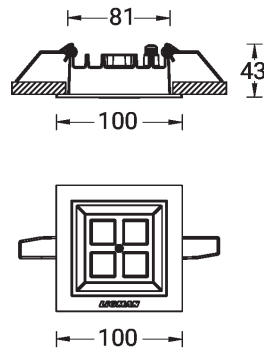

BRIGHTON 4 (BRI-80002)

Accessory



DALI Control System
Control-DALI
