


PROLINE 4 (ITRB30XXXX1020)

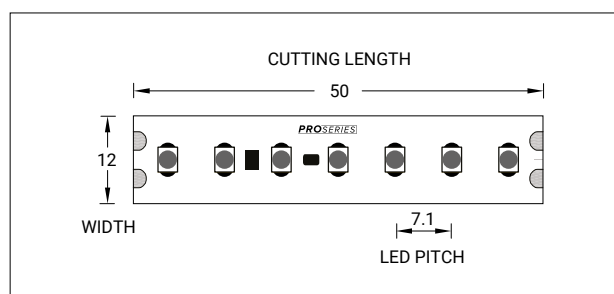

Luminaire Structure

- 24V DC
- CRI 95
- 2 SDCM
- Dimmable by PWM signal
- L80 B10: 50,000 hours
- IP20
- 7 years warranty
- 3M VHB tape. A LIGMAN approved aluminium profile for thermal management is required
- Sold in 5-metre length
- Remote driver not included

PROSERIES


Product description

30 W/m - Maximum run per feed 10 m

Technical information

Power	30 W/m	Driver option	Remote driver (Not included)
Input voltage	24V DC	Operating temperature	-20°C ~ +60°C
Input current	1250 mA/m	Life time L80B10	50,000 hours
EEC	A++	Control	PWM
MacAdam Ellipse	2 SDCM	Driver	Constant voltage (CV)
Beam angle	115°	CRI	Ra > 95
LED pitch	7.1 mm	Maximum run per power feed	10 m
Warranty	7 years	Dimensions	Width: 12 mm x Height: 1.6 mm
Cutting length	50 mm		

PRODUCT NAME	VARIANT CODE	COLOUR TEMPERATURE	LUMEN	EFFICACY
PROLINE 4	ITRB3027001020	2700K	3250lm/m	108lm/W
	ITRB3030001020	3000K	3300lm/m	110lm/W
	ITRB3040001020	4000K	3350lm/m	112lm/W

Note :
- Colour variance +/- 60K.
- Electrical & optical data variance +/-10%.

Accessories



Driver PWM - 50 W - IP20 -
Constant voltage - 24V
A32791-PW



Driver PWM - 100 W - IP20 -
Constant voltage - 24V
A32891-PW



Driver PWM - 150 W - IP20 -
Constant voltage - 24V
A32991-PW



Driver PWM - 120 W - IP20 -
Constant voltage - 24V
A33091-PW

We reserve the right to make technical and design changes.

Edition: 26-11-2019

www.ligman.com

EUROPE
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com