


LIGHTALK 2

LA-60014




Luminaire Structure

- A small profile low copper content die-cast aluminium
- Extruded aluminium body with high corrosion resistance
- Power is provided through a single watertight cable gland.
- Two cable glands are available upon request
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket and clear toughened 8mm. Thickness glass with a walk over rating of 500Kg. Maximum load
- The luminaire is available in 2 lengths with a standard stainless steel grade 316 frame
- Main housing is treated with a chemical chromatised protection before powder coating, ensuring high corrosion resistance
- A60951 and A61051 are recessing box accessory must be ordered separately.



Light Symbol

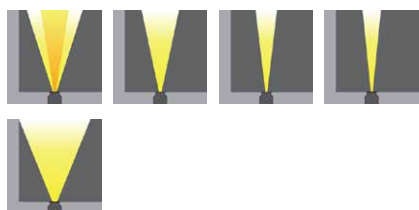

Product colors



- 00
Stainless
Steel

Product description:

Without recessing box - RGBW

Technical information

Lamp	2x20 LED
Weight	7.4 kg
EEC	A+
Material	Stainless Steel
Optic	VN 10° N 13° M 25° W 43° E 28° x35°
Colour	RGBW 40
Dimming type	DMX

Luminaire	
Power	66 W
Lumen	3302 - 3839 lm
Efficacy	50 - 58 lm/W
Drive current	500 mA

We reserve the right to make technical and design changes.

Edition: 14-03-2019

www.ligman.com/LIGHTALK-2-LA-60014

LIGMAN EUROPE S.R.O.
VGP Park Ústí nad Labem, P 2
Přestanov 113
403 17 Přestanov
Czech Republic
Tel. +420 608 740 504
sales.cz@ligman.com

LIGMAN ASIA PACIFIC
2300 Rama Rd
Suan Luang
Suan Luang, Bangkok
10250, Thailand
Tel. +662 321 8211
info@ligman.com

LIGHTTALK 2

LA-60014

Accessories

			
SLESA-U9 A60491	SLESA-UE7 A60691	STICK-KE1 A60791	Recessing box A61051

Format Reference Format Name

LA-60014-VN-40	LIGHTTALK 2 - LA-60014 - 2 x 20 LED - 66 W - 10° - RGBW40 - DMX - Stainless Steel
LA-60014-N-40	LIGHTTALK 2 - LA-60014 - 2 x 20 LED - 66 W - 13° - RGBW40 - DMX - Stainless Steel
LA-60014-M-40	LIGHTTALK 2 - LA-60014 - 2 x 20 LED - 66 W - 25° - RGBW40 - DMX - Stainless Steel
LA-60014-W-40	LIGHTTALK 2 - LA-60014 - 2 x 20 LED - 66 W - 43° - RGBW40 - DMX - Stainless Steel
LA-60014-E-40	LIGHTTALK 2 - LA-60014 - 2 x 20 LED - 66 W - 28° x35° - RGBW40 - DMX - Stainless Steel