LIGMAN

EDINBURGH 11 (EDB-20001)

CE | ⏚ | IP66 | IK08

Product description

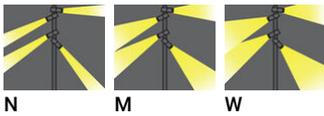Supplied with specific 3 m cylindrical,straight aluminium pole: APD130070-EDINBURGH

micro Prim™

Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Adjustable: Tilt 90° (Up) & 20° (Down), Rotation 350°

- Single cable entry, through wiring upon request
- One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket

- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

Optic

N | M | W

Product colour

01 - Black (RAL 9011)
02 - Dark Grey (RAL 7043)
03 - White (RAL 9003)
05 - Matt Silver (RAL 9006)
06 - Bronze (RAL 6014)

Special finishes upon request

SU01 - Concrete - Urban
SU02 - Softscape - Urban
SU03 - Stone - Urban
SU04 - Corten - Urban
SW01 - Oak - Woodland
SW02 - Walnut - Woodland
SW03 - Pine - Woodland

GLP
Good Labour Practices

Technical information

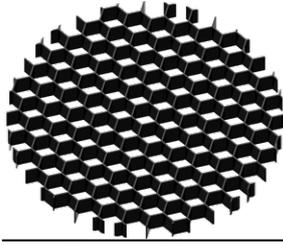|					
Material	Aluminium	**Optic value**	24°, 30°, 47°	**Operating temperature**	-20 °C to 50 °C
Light source	4 x 3 LED	**CCT / CRI**	2700K CRI80, 3000K CRI80, 4000K CRI80	**EPA (m2)**	0.274
Power	32 W			**Cable**	One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
Lumen	2528 - 3404 lm	**Bug**	B1-U0-G0		
Efficacy	79 - 106 lm/W	**ULR**	<1%		
Driver option	Integral control gear	**ULOR**	<1%	**Through wiring**	Single cable entry, through wiring upon request
Driver	Constant current (CC)	**CIE flux code nº3**	100	**Lens / Reflector / Optic**	High-efficiency PMMA lens, Clear toughened glass
Input voltage	220-240V 50/60Hz	**Dimming type**	On/Off	**MacAdam Ellipse**	3 SDCM
Optic	N, M, W	**Product colours**	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	**Lifetime L90B10 (hours)**	> 120,000
				Lifetime L80B10 (hours)	> 120,000
		Weight	8.9 kg	**Lifetime L80B50 (hours)**	> 120,000

EDB-20001

08:40, 26-02-2026

https://www.ligman.com/edinburgh-11-edb-20001/

GLP Good Labour Practices

LIGMAN
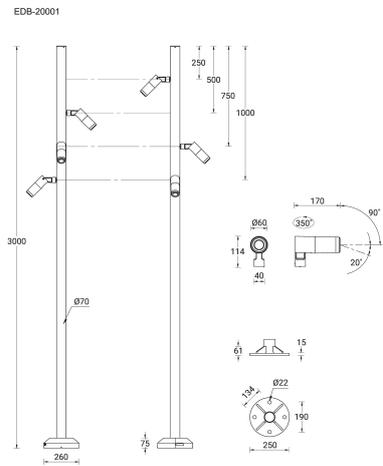
EDINBURGH 11 (EDB-20001)

Accessory

Anti-glare visor
A55331

Honeycomb louvre
A57521

Root mount kit
A24391

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)

3 m - Cylindrical, straight
aluminum pole for EDINGURGH
APD130070-EDINBURGH

08:40, 26-02-2026

https://www.ligman.com/edinburgh-11-edb-20001/

GLP
Good
Labour
Practices