

EDINBURGH 4 (EDB-50031)



Product description

Circular fixed-base - IP65



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Adjustable: Tilt 90° (Up) & 20° (Down), Rotation 350°
- Single cable entry. Through wiring upon request with optional surface mounting box accessory


- One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Integral control gear


Optic



Product colour

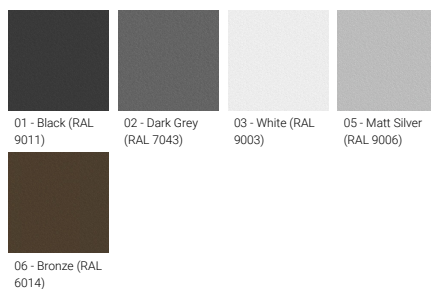

Special finishes upon request

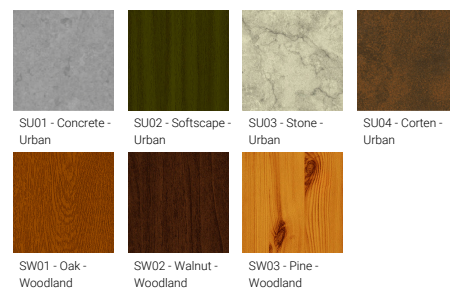


EDINBURGH 4 (EDB-50031)

Technical information

Material	Aluminium	Optic value	24°, 30°, 47°	Operating temperature	-20 °C to 50 °C
Light source	3 LED	CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80	EPA (m2)	0.020
Power	8 W	Bug	B1-U0-G0	Cable	One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable
Lumen	632 - 851 lm	ULR	<1%	Through wiring	Single cable entry. Through wiring upon request with optional surface mounting box accessory
Efficacy	79 - 106 lm/W	ULOR	<1%	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Driver option	Integral control gear	CIE flux code n°3	100	MacAdam Ellipse	3 SDCM
Driver	Constant current (CC)	Dimming type	On/Off	Lifetime L90B10 (hours)	> 120,000
Input voltage	220-240V 50/60Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 120,000
Optic	N, M, W	Weight	1.4 kg	Lifetime L80B50 (hours)	> 120,000


EDB-50031

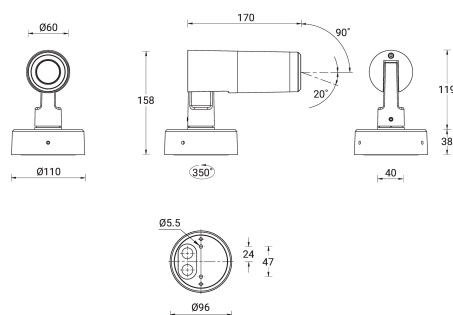

Accessory



Anti-glare visor
A55331

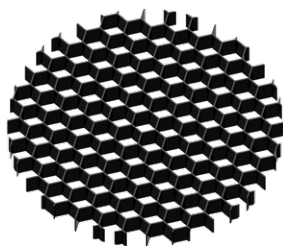

Honeycomb louvre
A57521

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.