

SLIMSOFT 1 (SLI-10011)



Product description

Ø102 - 1000 mm - With 360° light distribution



microPrim™



Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear acrylic PMMA diffuser
- High-efficiency PMMA lens
- Integral control gear

Optic




G

Product colour



Special finishes upon request

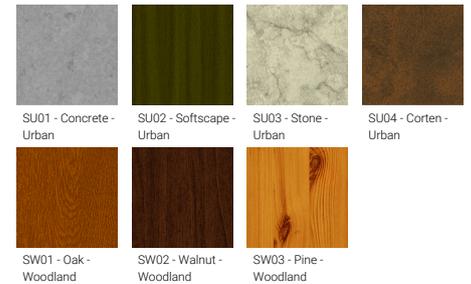

SLIMSOFT 1 (SLI-10011)


Technical information

Material	Aluminium
Light source	8 LED
Power	9 W
Lumen	370 - 406 lm
Efficacy	41 - 45 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240V 50/60Hz

Optic	G
Optic value	360°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B0-U1-G0
ULR	2%
ULOR	2%
CIE flux code n°3	92
Dimming type	On/Off, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	4.0 kg
Operating temperature	-20 °C to 50 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear acrylic PMMA diffuser, High-efficiency PMMA lens
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

SLI-10011



SLIMSOFT 1 (SLI-10011)**Accessory**



Anchor bolt
A10791



DALI Control System
Control-DALI