

BORNHOLM 3 (BOH-60023) (Version 1)



Product description


Without remote driver - With recessing box - Constant voltage (CV) 24 V



Luminaire Structure

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in stainless steel 316 grade
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length
- Maximum distance of the Remote DMX/RDM decoder is 8 m

Optic

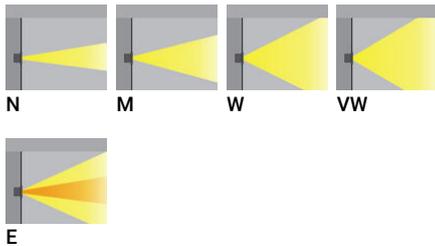

Product colour



BORNHOLM 3 (BOH-60023) (Version 1)


Technical information


| | |
|----------------------|------------------------------|
| Material | Stainless Steel |
| Light source | 9 LED |
| Power | 21 W |
| Lumen | 1907 - 2319 lm |
| Efficacy | 91 - 110 lm/W |
| Driver option | Remote driver (not included) |
| Driver | Constant voltage (CV) |
| Input voltage | 24 VDC |
| Optic | N, M, W, VW, E |

| | |
|--------------------------|---------------------------------|
| Optic value | 11°, 17°, 32°, 71°x58°, 43°x11° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B2-U0-G0, B3-U0-G0 |
| ULR | <1% |
| ULOR | <1% |
| CIE flux code n°3 | 100 |
| Dimming type | On/Off |
| Product colours | Stainless Steel |
| Weight | 2.3 kg |

| | |
|---------------------------------|---------------------------------------------------------------|
| Operating temperature | -20 °C to 40 °C |
| Cable | One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | Clear toughened glass |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 120,000 |
| Lifetime L80B10 (hours) | > 120,000 |
| Lifetime L80B50 (hours) | > 120,000 |

BOH-60023

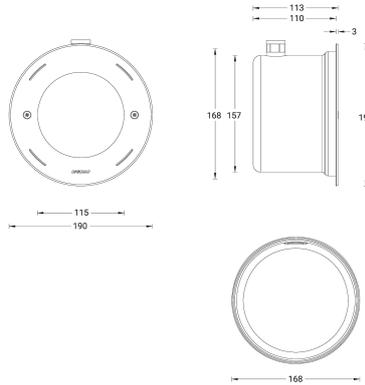

BORNHOLM 3 (BOH-60023) (Version 1)**Accessory**

Honeycomb louvre
A52421



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND