

FORREY 34 (FOR-30082)



Product description


Ø508 - 707 mm - With shade & louver



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Models with shade will have colour white coating at inside of shade luminaire and outside surface coating according to colour of luminaire
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- White coated aluminium reflector on the top of luminaire
- High-efficiency PMMA lens
- Integral control gear
- FORREY luminaires with opal lens and colder than 3000K CCT do not meet the IDA certification requirements


Optic



Product colour



Special finishes upon request

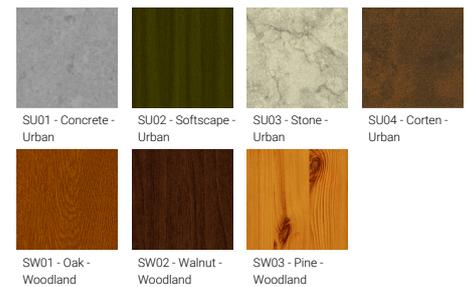


FORREY 34 (FOR-30082)

Technical information

Material	Aluminium	Optic	T2, T3, T4, T5	Lens / Reflector / Optic	White coated aluminium reflector on the top of luminaire, High-efficiency PMMA lens	
Light source	1 COB	Optic value	143°x84°, 141°x89°, 129°x115°, 143°	MacAdam Ellipse	3 SDCM	
Power	48 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 50,700	
Lumen	3413 - 3749 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 63,500	
Efficacy	72 - 79 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 63,500	
Driver option	Integral control gear			Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
Driver	Constant current (CC)					
Input voltage	220-240 V 50/60 Hz	Weight	15.0 kg			
		Operating temperature	-20 °C to 40 °C			
		Through wiring	Two cable entries for through wiring			

FOR-30082

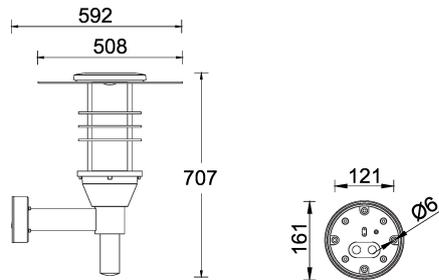

FORREY 34 (FOR-30082)

Accessory



DALI Control System
Control-DALI
