

ODESSA 12 (OD-50142)



Product description

Large - RGBW




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Arm mounting installation


Optic

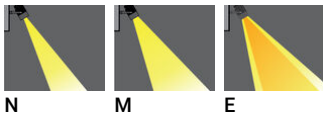

Product colour

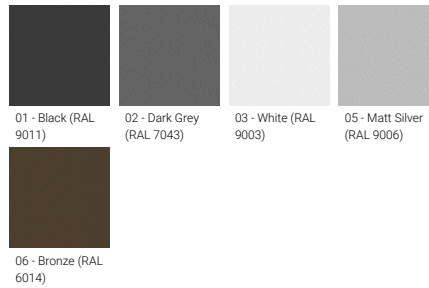

Special finishes upon request

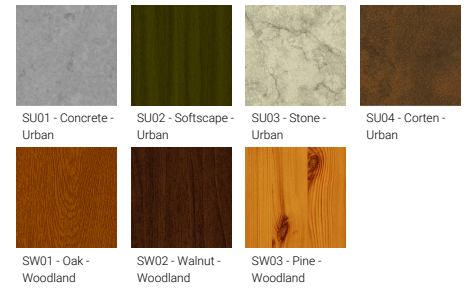

ODESSA 12 (OD-50142)


Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 7 LED |
| Power | 33 W |
| Lumen | 1192 - 1422 lm |
| Efficacy | 36 - 43 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |

| | |
|------------------------|--|
| Input voltage | 220-240 V 50/60 Hz |
| Optic | N, M, E |
| Optic value | 20°, 34°, 24° x 49° |
| CCT / CRI | RGBW30, RGBW40 |
| Dimming type | DMX, DMX/RDM |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 5.0 kg |

| | |
|---------------------------------|--|
| Operating temperature | -20 °C to 40 °C |
| EPA (m2) | 0.054 |
| Cable | Three IP68 connectors supplied with 0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | High-efficiency PMMA lens, Clear toughened glass |
| Variants (DMX, DMX/RDM) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

OD-50142

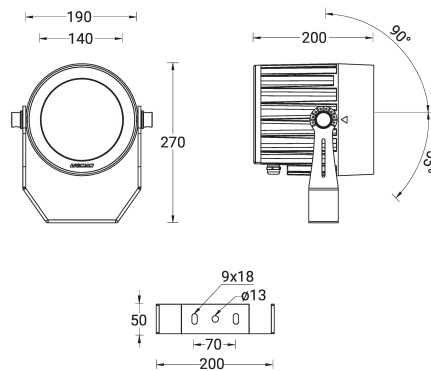

ODESSA 12 (OD-50142)**Accessory**



Anti glare visor
A54431



Anti glare louvre
A54631



Linear spread lens
A51814



Honeycomb louvre
A54121



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.