

ABERDEEN 1 (ABA-20001-LC)



Product description

Top Ø700 mm - LIGHTCONNECT™




LIGHT CONNECT™ microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser
- Integral control gear


Optic

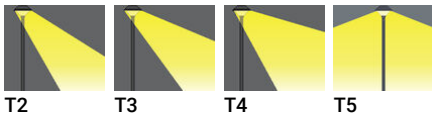

Product colour

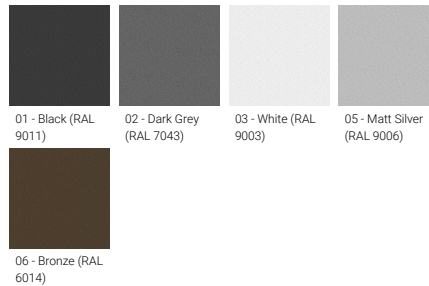

Special finishes upon request

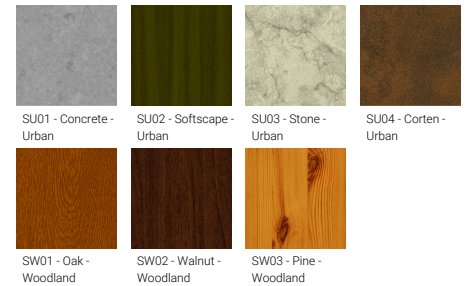

ABERDEEN 1 (ABA-20001-LC)


Technical information

Material	Aluminium
Light source	24 LED
Power	45 W
Lumen	5627 - 6228 lm
Efficacy	125 - 138 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	T2, T3, T4, T5
Optic value	142°x59°, 142°x72°, 102°x63°, 119°x147°

CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U3-G1, B2-U3-G2, B3-U2-G1
ULR	1%, 2%
ULOR	1%, 2%
CIE flux code n°3	94
Dimming type	DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	16.5 kg
Operating temperature	-20 °C to 40 °C
EPA (m2)	0.211

Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear acrylic PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

ABA-20001

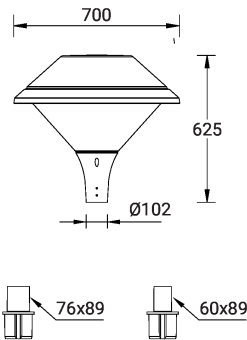

ABERDEEN 1 (ABA-20001-LC)**Accessory**



Zhaga Book 18 socket (Up)
A90991-U



NEMA 7 socket
A90891



DALI Control System
Control-DALI
