

ALDO 8 (ALD-30292) (Version 1)



Product description

Without remote driver - Constant voltage (CV) 24 V - 80x95 mm - 1000 mm - Class III - IK07




microPrim™

Luminaire Structure

- Powder coated aluminium alloy housing
- Adjustable aluminium extrusion bracket for ALD-30261, ALD-30262, ALD-30263, ALD-30264, ALD-30265, ALD-30266, ALD-30271, ALD-30272, ALD-30281, ALD-30282, ALD-30291, ALD-30292, ALD-30301, ALD-30302, ALD-30801
- Adjustable galvanised steel bracket for ALD-30241, ALD-30242, ALD-30243, ALD-30244, ALD-30251, ALD-30252, ALD-30253, ALD-30254, ALD-30255, ALD-30256
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Clear toughened glass
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.
- For ALD-30001 not included 24 VDC input, DMXRDM address with stable signal


Optic

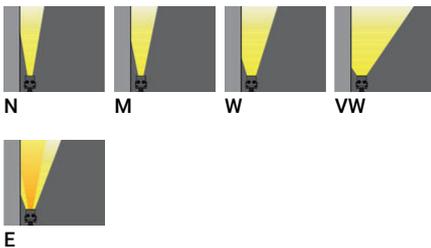

Product colour



Special finishes upon request

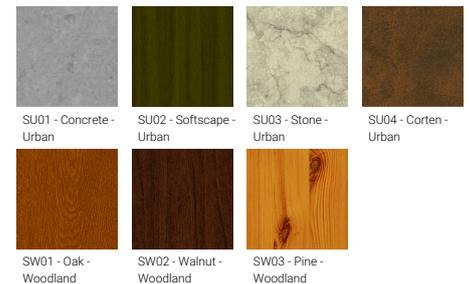


ALDO 8 (ALD-30292) (Version 1)

Technical information

| | |
|----------------------|------------------------------|
| Material | Aluminium |
| Light source | 36 LED |
| Power | 75 W |
| Lumen | 7368 - 9224 lm |
| Efficacy | 98 - 123 lm/W |
| Driver option | Remote driver (not included) |
| Driver | Constant voltage (CV) |
| Input voltage | 24 VDC |

| | |
|--------------------------|------------------------------|
| Optic | N, M, W, VW, E |
| Optic value | 11°, 17°, 34°, 63°, 12°x 44° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B3-U0-G0, B4-U0-G0 |
| ULR | <1% |
| ULOR | <1% |
| CIE flux code n°3 | 100 |
| Dimming type | On/Off |

| | |
|---------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 3.2 kg |
| Operating temperature | -20 °C to 40 °C |
| Cable | Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable |
| Through wiring | Two cable entries for through wiring |
| Lens / Reflector / Optic | Clear toughened glass |

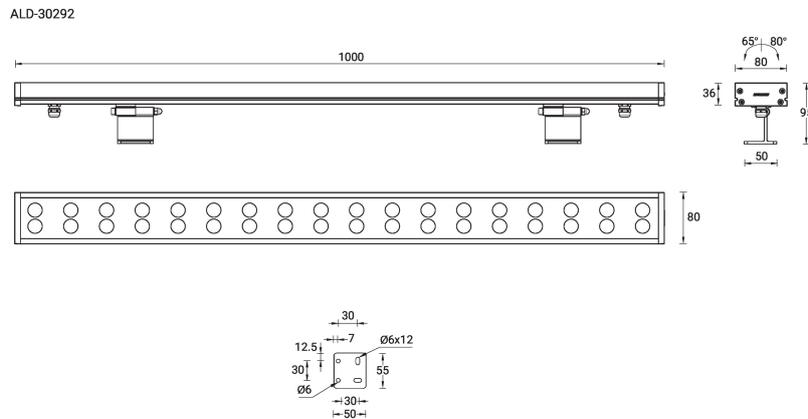


ALDO 8 (ALD-30292) (Version 1)

Accessory




Cable - Connector IP67 Female 2
Pin Power - 1000 mm
A65491-001

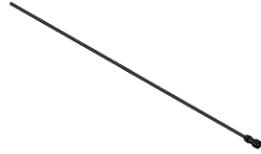

Cable - Connector IP67 Female 2
Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female +
Male 2 Pin Power - 1000 mm
A65591-001



Cable - Connector IP67 Female +
Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin
Power
A68191



Connector IP67 Male 2 Pin
Power
A68291



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND