

LEEDS 1 (LEE-30031)



Product description

Down (Optic) & Up (Optic 2nd) - Square



microPrim™


Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

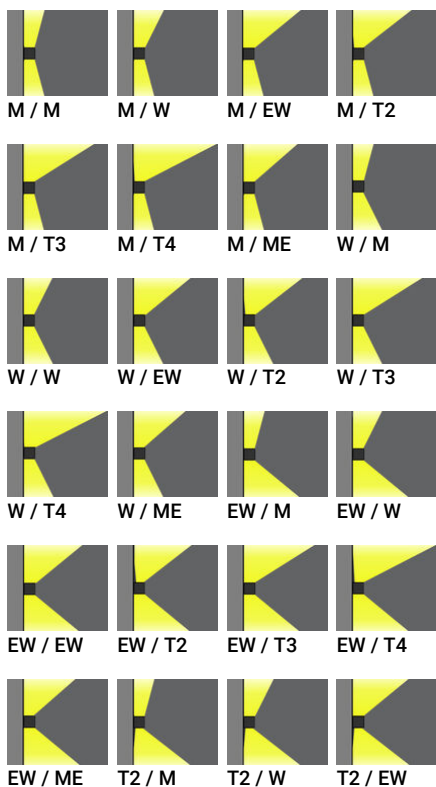

Product colour

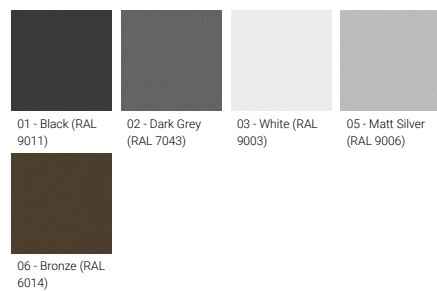

Special finishes upon request

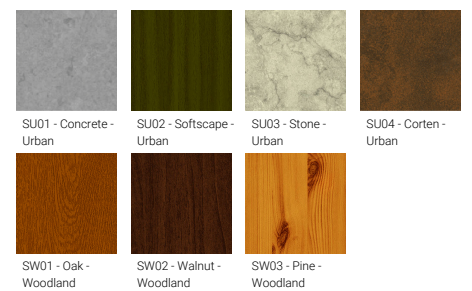

LEEDS 1 (LEE-30031)



T2 / T2 T2 / T3 T2 / T4 T2 / ME



T3 / M T3 / W T3 / EW T3 / T2



T3 / T3 T3 / T4 T3 / ME T4 / M



T4 / W T4 / EW T4 / T2 T4 / T3



T4 / T4 T4 / ME ME / M ME / W



ME / EW ME / T2 ME / T3 ME / T4



ME / ME

LEEDS 1 (LEE-30031)


Technical information

| | |
|----------------------|--------------------------|
| Material | Aluminium |
| Light source | 4 & 4 LED |
| Power | 15 W |
| Lumen | 1090 - 1590 lm |
| Efficacy | 84 - 122 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | M, W, EW, T2, T3, T4, ME |

| | |
|--------------------------|--|
| Optic value | 30°, 56°, 99°x102°, 130°x50°, 112°x80°, 90°x61°, 122°x50° |
| Optic (2nd) | M, W, EW, T2, T3, T4, ME |
| Optic (2nd) value | 30°, 56°, 99°x102°, 130°x50°, 112°x80°, 90°x61°, 122°x50° |
| CCT / CRI | 2700K CRI80, 3000K CRI80, 4000K CRI80 |
| Bug | B0-U4-G0, B1-U4-G0 |
| ULR | 43%, 44%, 45%, 46%, 47%, 48%, 49%, 50%, 51%, 52%, 53%, 54%, 55%, 56%, 57% |
| ULOR | 43%, 44%, 45%, 46%, 47%, 48%, 49%, 50%, 51%, 52%, 53%, 54%, 55%, 56%, 57% |
| Dimming type | On/Off |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |

| | |
|---------------------------------|--|
| Weight | 1.1 kg |
| Operating temperature | -20 °C to 50 °C |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | Clear toughened glass, High-efficiency PMMA lens |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 90,000 |
| Lifetime L80B10 (hours) | > 90,000 |
| Lifetime L80B50 (hours) | > 90,000 |

LEE-30031

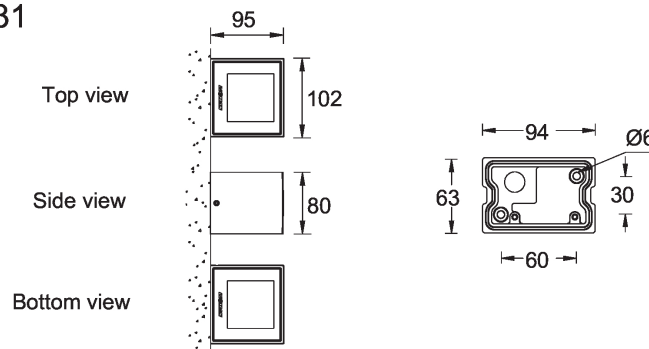

LEEDS 1 (LEE-30031)**Accessory**



Surface mounting box for easy
cabling (LEEDS 1)
SCE-LEEDS-1
