


**PALETTA 5 (PA-31942-1MS)**



**Product description**

355x355 mm - With integrated motion sensor




microPrim™



**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

**Optic**




G

**Product colour**



**Special finishes upon request**

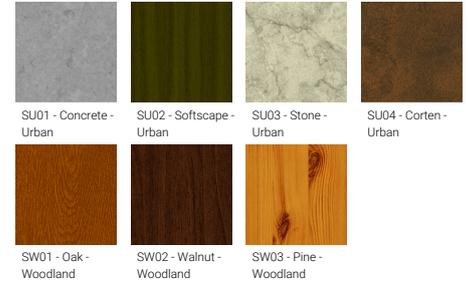

**PALETTA 5 (PA-31942-1MS)**



**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	96 LED
<b>Power</b>	27 W
<b>Lumen</b>	2362 - 2486 lm
<b>Efficacy</b>	87 - 92 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	G

<b>Optic value</b>	129°x129°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U2-G1
<b>ULR</b>	6%
<b>ULOR</b>	6%
<b>CIE flux code n°3</b>	92
<b>Dimming type</b>	On/Off, 1-10V
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	4.8 kg

<b>Through wiring</b>	Two cable entries for through wiring
<b>Lens / Reflector / Optic</b>	Opal UV-stabilised polycarbonate diffuser
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 15,000
<b>Lifetime L80B10 (hours)</b>	> 30,000
<b>Lifetime L80B50 (hours)</b>	> 34,000
<b>Variants (1-10V)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

PA-31942-1MS

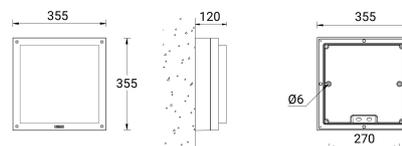

- PALETTA**
- Micro sensor - Microwave - 1-10V**  
Adjustable sensor (10 seconds - 15 minutes)  
100° Sensitivity  
Sensor detection area: 7.7 - 4.0 m
  - Micro sensor - Microwave - On/Off**  
Adjustable sensor (5 seconds - 20 minutes)  
100° Sensitivity  
Sensor detection area: 1.0 - 8.0 m

**PALETTA 5 (PA-31942-1MS)****Accessory**

---



---

Surface mounting box for easy  
cabling (PALETTA 5)  
**SCE-PALETTA-5**

---



---

DALI Control System  
**Control-DALI**

---



---

Remote controller for the motion  
sensor - 1-10V (A34191)  
**A34391**

---