


TAURAS 3 (TU-20396-2)



Product description

Ø160 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125160-TU-20396-2



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Mat finishing aluminium reflector
- Clear UV-stabilised polycarbonate diffuser
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

Optic




G

Product colour

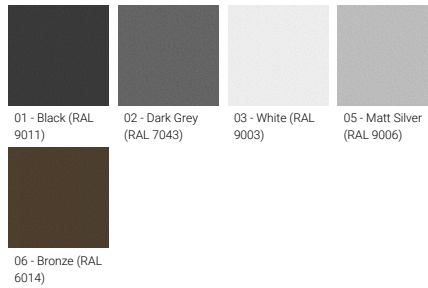

Special finishes upon request

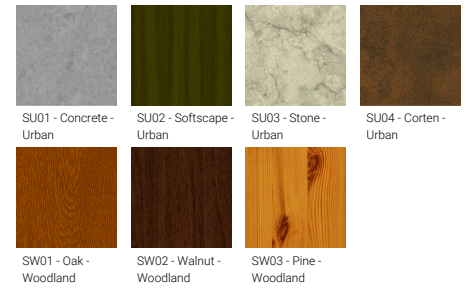


TAURAS 3 (TU-20396-2)

Technical information

Material	Aluminium
Light source	1 COB
Power	41 W
Lumen	1082 - 1096 lm
Efficacy	26 - 27 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	172°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	32.6 kg
Operating temperature	-20 °C to 40 °C
EPA (m2)	0.511

Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Mat finishing aluminium reflector, Clear UV-stabilised polycarbonate diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 55,000
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

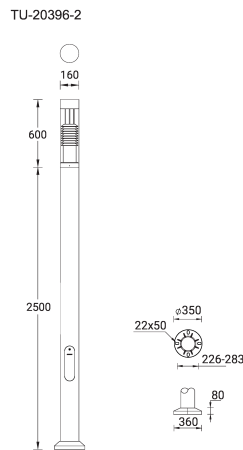

TAURAS 3 (TU-20396-2)**Accessory**



Root mount kit
A20691



Circuit breaker box IP44
A21291



DALI Control System
Control-DALI

Pole (required)



2.5 m - Cylindrical, straight
aluminium pole for TAURAS
APD125160-TU-20396-2