


MATRIX 5 (MT-31408)



Product description

Down - Without lamp



Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible
- MATRIX luminaires with uplight and colder than 3000K CCT do not meet the IDA certification requirements

Optic



L

Product colour

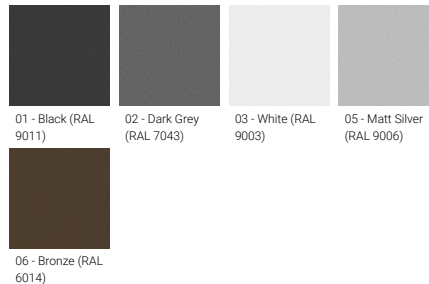

Special finishes upon request




MATRIX 5 (MT-31408)

Technical information

Material	Aluminium
Light source	HIT-TC-CE
Power	35 W
Lumen	120 lm
Efficacy	3 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	L
Optic value	5°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.1 kg

Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 109,000
Lifetime L80B10 (hours)	> 109,000
Lifetime L80B50 (hours)	> 109,000



MATRIX 5 (MT-31408)**Accessory**



Surface mounting box for easy
cabling (MATRIX 5)
SCE-MATRIX-5



DALI Control System
Control-DALI
