

BRISBANE 4 (BRB-95031)**Product description**

Ø127 mm

**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Reflector finishes options (Satin black, Satin gold, Matt white)
- Remote driver (included)
- CRI 95

Optic**W****Product colour**

01 - Black (RAL 9011)

03 - White (RAL 9003)

BRISBANE 4 (BRB-95031)


Technical information

Material	Aluminium
Light source	1 COB
Power	43 W
Lumen	3954 - 4033 lm
Efficacy	92 - 94 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	W
Optic value	55°
CCT / CRI	3000K CRI95, 4000K CRI95
Bug	B3-U0-G0
ULR	<1%
ULOR	<1%

CIE flux code n°3	100
Dimming type	On/Off, DALI
Product colours	Black, White
Weight	4.2 kg
Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Reflector finishes options (Satin black, Satin gold, Matt white)
Variants (On/Off, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BRB-95031

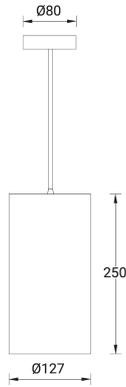

BRISBANE 4 (BRB-95031)**Accessory**



Reflector finish (Satin black)
A80025-SB



Reflector finish (Satin gold)
A80025-SG



Reflector finish (Matt white)
A80025-MW



DALI Control System
Control-DALI